

## ProMinent® DULCOTEST Sensors

### Overview: Sensors

#### DULCOTEST Sensors

DULCOTEST Sensors supply exact, reliable and application-specific measured values in real time for the purpose of effectively monitoring or controlling processes. The sensors can be optimally integrated in the ProMinent® control circuit together with controllers and metering pumps. Many different types of fitting are available for optimum integration in specific processes. The measurement methods

- Potentiometry (pH, ORP, fluoride)
- Amperometry (disinfectant)
- Conductivity (salinity, alkalinity, acidity)

cover the most important measurement parameters found in water treatment applications. The sensors are stable in the long term, require minimum maintenance and are easy to install, calibrate and service.

#### Potentiometric DULCOTEST Sensors

The DULCOTEST Sensors pH and ORP sensors represent a comprehensive range of sensors for solving all measurement tasks. The range of applications extends from simple use in water treatment systems through to industrial process applications with demanding requirements in terms of temperature, pressure as well as resistance to soiling and chemicals.

- Long service life ensured by premium glass quality and an optimum combination of automated and manual production
- Precise and reliable measurement for efficient processes and maximum process reliability
- Tailored process integration guaranteed by special versions with individual installation lengths, cable lengths and connectors
- Short delivery and storage times ensure optimum electrode life

#### Amperometric DULCOTEST Sensors

The amperometric sensors of the DULCOTEST Sensors product line supply measured values for the most diverse range of disinfectants such as e.g. chlorine, bromine, chlorine dioxide, ozone. The selective and exact measured values ensure maximum process reliability and are made available round the clock in real time either for monitoring or controlling applications. ProMinent sets standards with its sensor systems: Innovative sensors such as for chlorite, total chlorine, peracetic acid, hydrogen peroxide and dissolved oxygen enhance the product range. The sensors are available for different measuring ranges, in different connection variants for DULCOMETER measuring and control devices and as special versions for specific applications.

#### DULCOTEST Sensors for Electrolytic Conductivity

The comprehensive product line of DULCOTEST Sensors conductivity sensors ensures the right sensor is selected with optimum price/performance ratio in applications ranging from simple water treatment through to intricate industrial process waste water processing. 27 different types of sensor tailored to the most diverse range of requirements: Measuring range, temperature, chemical resistance, soiling compatibility and process integration


- From simple conductometric 2-electrodes through to inductive high-end sensors
- Precise and reliable measurement for efficient process control and maximum process reliability
- Long service life and long maintenance intervals reduce downtimes and increase the availability of the measured values
- Completely preassembled fitting and sensor sets for simple, fast and flawless installation



# ProMinent® DULCOTEST Sensors

## Overview: Sensors

### Selection Guide DULCOTEST Sensors pH Sensors

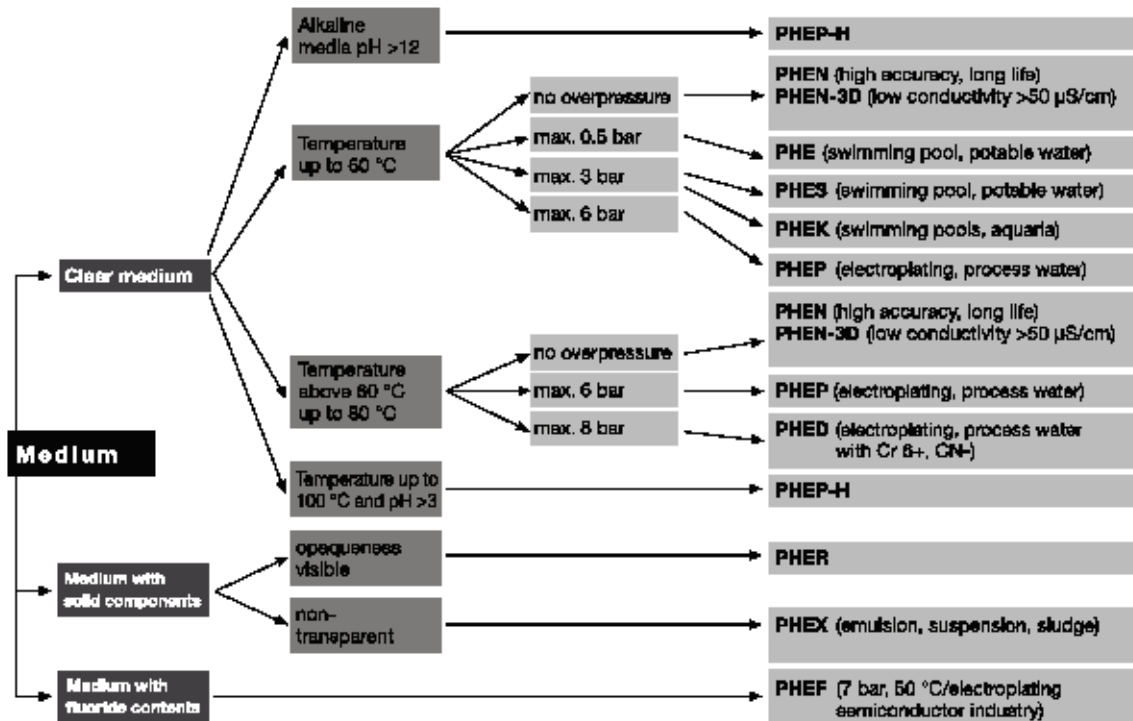

### Selection Guide: Amperometric Sensors


Measured variable	Applications	measuring range	Connection to DULCOMETER®	Sensor type
Free chlorine	Drinking water, swimming pool	0.01–100 ppm	D1C, DAC	CLE 3-mA-xppm, CLE 3.1-mA-xppm
Free chlorine	Drinking water, swimming pool water, in situ electrolysis (without diaphragm)	0.02-10 ppm	D1C, DAC	CLO 1-mA-xppm
Free chlorine	Hot water up to 70 °C (legionella), in situ electrolysis (without diaphragm)	0.02-2 ppm	D1C, DAC	CLO 2-mA-2ppm
Free chlorine	Drinking water, swimming pool	0.01–50 ppm	DMT	CLE 3-DMT-xppm, CLE 3-CAN-xppm, CLE 3.1-CAN-
Free chlorine	Drinking water, swimming pool	0.01–10 ppm	DULCOMARIN® II	CLE 3.1-CAN-
Free chlorine	Drinking water, swimming pool	0.05-5 ppm	COMPACT	CLB 2-µA-xppm

# ProMinent® DULCOTEST Sensors

## Overview: Sensors

Measured variable	Applications	Graduated measuring	Connection to DULCOMETER®	Sensor type
<b>Total available bromine</b>	Cooling water, swimming pool water, whirlpool water, bromine with bromorganic disinfectants (e.g. BCDMH)	0.2–10 ppm	D1C, DAC	BRE 1-mA-xppm
<b>Total available bromine</b>	Cooling water, swimming pool water, whirlpool water, bromine with inorganic bromine compounds (e.g. NaBr/HOCl)	0.2–10 ppm	D1C, DAC	BRE 2-mA-xppm
<b>Total available bromine</b>	Cooling water, swimming pool water, whirlpool water with bromorganic or inorganic bromine compounds	0.02-10 ppm	DULCOMARIN® II	BRE 3-CAN-10 ppm
<b>Free and bound bromine</b>	Cooling water, process water, waste water, water with higher pH values (stable)	0.02-20 ppm	D1C, DAC D1C, DAC,	CBR 1-mA-xppm
<b>Chlorine dioxide</b>	Drinking water	0.01–10 ppm	DULCOMARIN® II D1C, DAC,	CDE 2-mA-xppm
<b>Chlorine dioxide</b>	Bottle washer system Hot water up to 60 °C, cooling water, waste	0.02–2 ppm	DULCOMARIN® II D1C, DAC,	CDP 1-mA
<b>Chlorine dioxide</b>	water, irrigation water	0.01-10 ppm	DULCOMARIN® II D1C, DAC,	CDR 1-mA-xppm


### Selection Guide DULCOTEST Sensors ORP Sensors

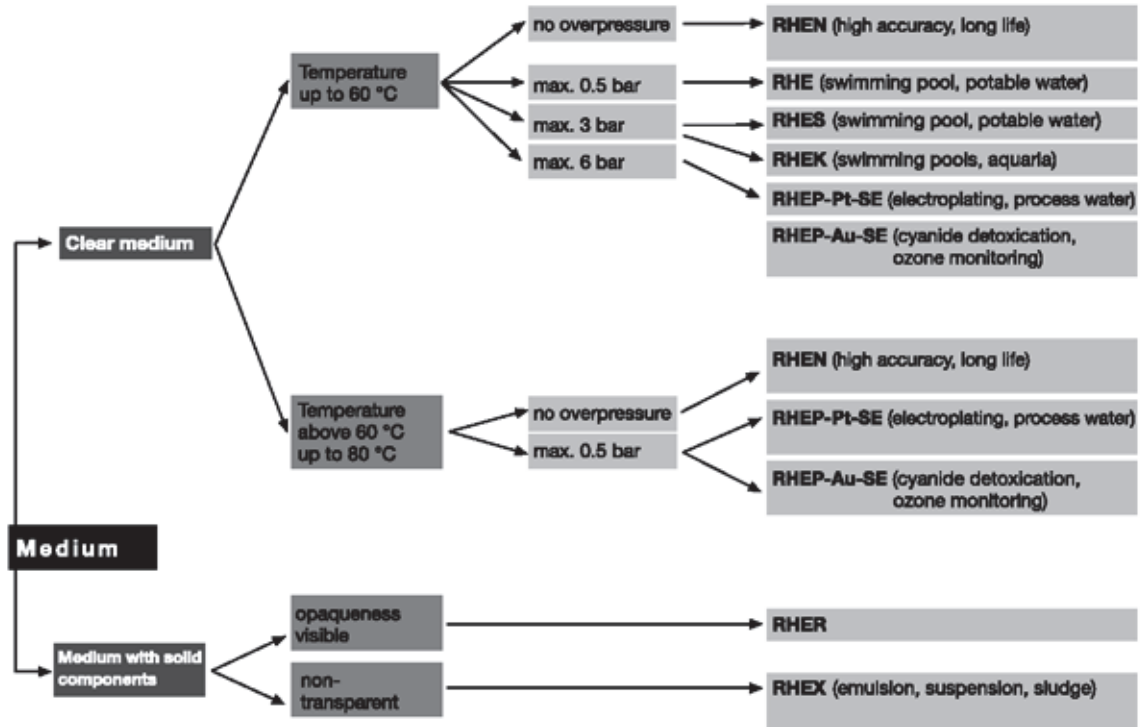

# ProMinent® DULCOTEST Sensors

## pH Sensors With SN6 or Vario Pin

Series:	
PHE	pH sensor
Properties:	
X	with solid electrolyte and circular gap diaphragm
K	with insensitive plastics shaft
N	refillable KCl electrode
E	Puncture electrode
R	with PTFE circular diaphragm
P	pressure tight up to 87.0 psi (6 bar)
D	2 ceramics diaphragms (double junction)
S	swimming pool electrode
F	resistant to hydrofluoric acid
	unspecified: standard gel-filled electrode
Special equipment:	
T	temperature up to 212 °F (100 °C), alkali-resistant
H	with built in temperature gauge
L	vertical to horizontal installation
pH measuring range:	
112	pH measuring range: 1 - 12
Electrical connection to electrode:	
S	Plug for coax connector SN6
V	Vario Pin plug
Internal thread:	
E	Internal thread PG 13.5 for installation
L	without, laboratory electrode refillable with KCl
Diaphragm:	
3D	3 ceramics diaphragms
<b>PHE X T 112 S E 3D</b>	

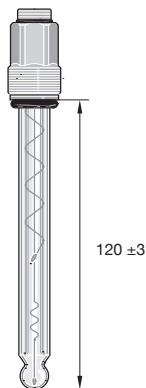

pk\_6\_016

### PHES 112 SE

pH range: 1-12  
 Temperature: 32-140 °F (0-60 °C)  
 Max. pressure: 7.25 psi (0.5 bar)  
 Min. conductivity: >150 µS/cm  
 Diaphragm: Ceramic  
 Installation length: 4.72" (120 ±3 mm), thread PG 13.5  
 Typical applications: Swimming pool, atmospheric pressure installation, potable water, lightly contaminated waste water.


PHES 112 SE

**Part No.**

150702

## ProMinent® DULCOTEST Sensors

### pH Combination Sensors With SN6

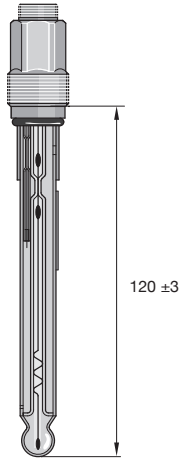


pk\_6\_019

#### PHEP 112 SE

pH range: 1-12  
 Temperature: 32-176 °F (0-80 °C)  
 Max. pressure: 87 psi (6 bar)  
 Min. conductivity: >150 µS/cm  
 Diaphragm: Ceramic  
 Installation length: 4.72" (120 ±3 mm), thread PG 13.5  
 Mounting hole: min Ø 0.6" (14.5 mm)  
 Typical uses: Swimming pools under pressure for higher temperatures and pressures, portable and industrial water, lightly soiled wastewater and the electroplating and chemical industries

**Part No.**

PHEP 112 SE	150041
-------------	--------

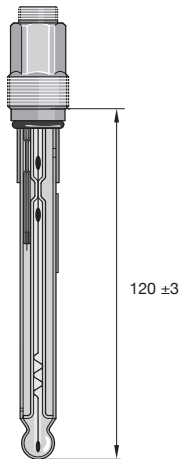


pk\_6\_019

#### PHEP-H 314 SE

pH range: 3-14 (Note: use below pH 3 shortens the service life)  
 Temperature: 32-212 °F (0-100 °C)  
 Max. pressure: 87 psi (6 bar) at 77 °F (25 °C)  
 43.5 psi (3 bar) at 212 °F (100 °C)  
 Min. conductivity: 150 µS/cm  
 Diaphragm: ceramic  
 Insertion length: 4.72" (120 ±3 mm), screw-in thread PG 13.5  
 Shank diameter: 0.47" (12 mm) min. diam.  
 Typical applications: monitoring or control of chemical processes with neutral to highly-alkaline media and temperatures up to 100 °C

**Part No.**

PHEP-H 314 SE	1024882
---------------	---------

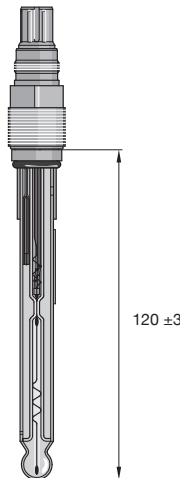

pk\_6\_068

#### PHEPT 112 VE


Technical data and conditions for use as type PHEP 112 SE, however, with integrated Pt 100 enclosed in glass shaft and Vario Pin plug with gold plated contacts.

**Part No.**

PHEPT 112 VE	1004571
--------------	---------

# ProMinent® DULCOTEST Sensors

## pH Combination Sensors With SN6




pk\_6\_018

### PHER 112 SE

pH range: 1-12  
 Temperature: 32-176 °F (0-80 °C)  
 Max. pressure: 87 psi (6 bar)  
 Min. conductivity: >50 µS/cm  
 Electrolyte with solid KCl supply (salt rings in the reference electrolyte)  
 Diaphragm: PTFE ring diaphragm  
 Installation Length: 4.72" (120 ±3 mm)  
 Typical applications: Municipal and industrial wastewater, process water, water in the chemical and paper manufacturing industries. General, for water with suspended solid content.

	<b>Part No.</b>
PHER 112 SE	1001586

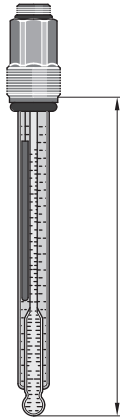

pk\_6\_017

### PHEX 112 SE

pH range: 1-12  
 Temperature: 32-212 °F (0-100 °C)  
 Max. pressure: 232 psi (16 bar) at 77 °F (25 °C); 87 psi (6 bar) at 212 °F (100 °C)  
 Min. conductivity: >500 µS/cm  
 Diaphragm: Circular gap diaphragm (solid electrolyte)  
 Installation length: 4.72" (120 ±3 mm)  
 Typical applications: Waste water, industrial water, process chemistry, emulsions, suspensions, fluids containing protein and sulphide (not for chlorine/fluoride or when subject to temperature fluctuations). General, for water with a high suspended solid content.  
 Not suitable for use in clear water

	<b>Part No</b>
PHEX 112 SE	305096
PHEX 112 SE Same as above but length 8.9" (225 ±3 mm)	150061

## ProMinent® DULCOTEST Sensors

### pH Combination Sensors With SN6

product overview

solenoid-driven metering pumps


motor-driven metering pumps

pump spare parts & accessories

DULCOMETER instrumentation

DULCOTEST sensors

polymer blending & dry feed solutions

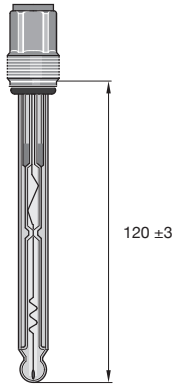


pk\_6\_022

#### PHED 112 SE

pH range: 1-12  
 Temperature: 32-176 °F (0-80 °C)  
 Max. pressure: 116 psi (8 bar)  
 Min. conductivity: >150 µS/cm  
 Diaphragm: Double junction  
 Installation length: 4.72" (120 ±3 mm)  
 Typical applications: Potable, industrial water, lightly contaminated waste water, cooling tower water

**Part No.**

PHED 112 SE	741036
-------------	--------

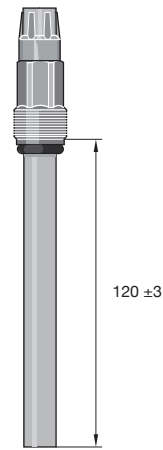

pk\_6\_007


#### PHEF 012 SE

pH range: 1-12  
 Temperature: 32-122 °F (0-50 °C)  
 Max. pressure: 100 psi/7 bar  
 Min. conductivity: >150 µS/cm  
 Diaphragm: HDPE ring diaphragm, flat (Double Junction)  
 Glass membrane: flat membrane glass, largely resistant to hydrofluoric acid solutions  
 Electrode shaft: epoxy  
 Typical applications: achieves a significantly longer service life in hydrofluoric acidic fluids as compared to standard pH electrodes, e.g. in wastewaters from the chip industry or electroplating applications.  
 The electrode is protected against dirt by the flat glass membrane and the circumferential flat PE diaphragm.

**HF**

**Part No.**

PHEF 012 SE	1010511
-------------	---------

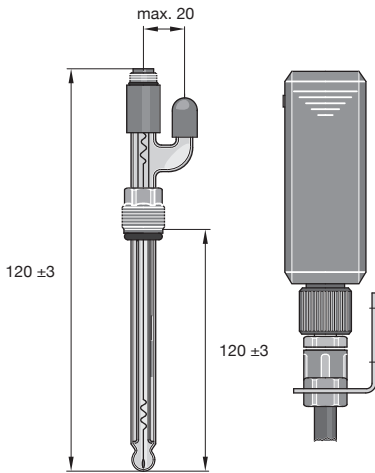

pk\_6\_021

#### PHEN 112 SE

pH range: 1-12  
 Temperature: 32-176 °F (0-80 °C)  
 Max. pressure: Atmospheric pressure  
 Min. conductivity: >150 µS/cm  
 Diaphragm: Ceramic  
 KCl electrolyte, refillable  
 Installation Length: 4.72" (120 ±3 mm)  
 Typical applications: Waste water  
 Supplied without PE storage container and tubing

**Part No.**

PHEN 112 SE	305090
-------------	--------

**Accessories:**

PE storage container with connectors and tubing	305058
---	--------


We recommend installation approx. 1.5 - 3 ft. (0.5-1 m) above sample fluid level

KCl solution 3 molar	250 ml	791440
----------------------	--------	--------

KCl solution 3 molar	1000 ml	791441
----------------------	---------	--------

# ProMinent® DULCOTEST Sensors

## pH Combination Sensors With SN6

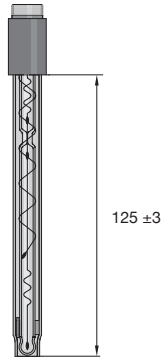

pk\_6\_023

### PHEK 112 SE

pH range 1-12  
 Temperature: 32-140 °F (0-60 °C)  
 Max. pressure: Atmospheric pressure operation  
 Min. conductivity: >150 µS/cm  
 Diaphragm: Glass fiber  
 No internal mounting thread, plastic shaft  
 Typical applications: Hand-held measurement in swimming pool, potable water


PHEK 112 SE

**Part No.**  
305051

## pH Sensors with Fixed Cable

### Series

PHE	pH sensor							
<b>Properties</b>								
K	with insensitive plastics shaft							
N	refillable KCl electrode							
D	with double diaphragm (double injection)							
<b>Special equipment</b>								
T	with built in temperature gauge							
<b>pH measuring range</b>								
112	pH measurement range: 1...12							
<b>Electrical connection to electrode</b>								
F	fixed cable electrode							
<b>Internal thread</b>								
E	Internal thread							
L	without, laboratory electrode refillable							
<b>Cable diameter</b>								
3	cable diameter 3 mm							
5	cable diameter 5 mm							
<b>Cable length</b>								
01	cable length in meters							
<b>Electrical connection at device</b>								
S	SN6							
D	DIN							
B	BNC							
O	without connector							
M	SN6 male							
PHE	K	T	112	F	E	3	1	S

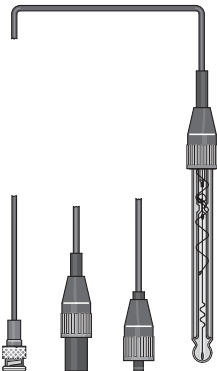

pk\_6\_024

### Type PHES 112 F


pH sensor, gel-filled, with coax cable and device plug, no internal thread.

Type	Cable length	Device plug	Part No.
PHES 112 F 301 S	3.3 ft. (1 m)	SN6	304976
PHES 112 F 303 B	9.8 ft. (3 m)	BNC	304981



# ProMinent® DULCOTEST Sensors

## pH Combination Sensors With SN6



pk\_6\_025

### PHEE 112 S

pH range: 1-12  
 Temperature: 32-140 °F (0-60 °C)  
 Max. pressure: Atmospheric pressure operation  
 Diaphragm: 3 ceramic diaphragms  
 No internal mounting thread  
 Typical applications: pH measurement in foodstuffs, e.g. meat, cheese  
 non sterilisable


**Part No.**

PHEE 112 S	791094
------------	--------

**Accessories**

Cleaning fluid Pepsin/hydrochloric acid 250 ml	791443
--	--------

## pH Combination Sensors With Fixed Cable

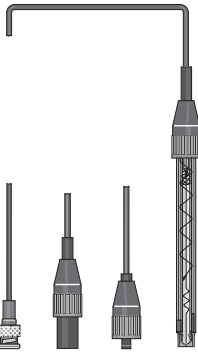


### Type PHEK 112 F

pH combination probe with plastic shaft, glass stem, fixed coax cable and connector, no internal thread.

Type	Cable length	Device plug	Part No.
PHEK 112 F 301 B	3.3 ft. (1 m)	BNC	304996


Further types on request.

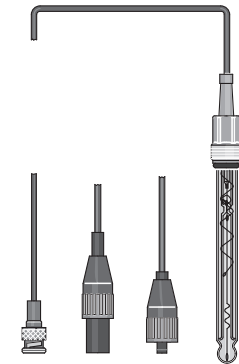

### Type PHE 112 FE

Type	Cable length	Device plug	Part No.
PHE 112 FE 303 S	9.8 ft. (3 m)	SN6	304984
PHE 112 FE 310 S	32.8 ft. (10 m)	SN6	304985
PHE 112 FE 303 B	9.8 ft. (3 m)	BNC	304988

Further types on request.

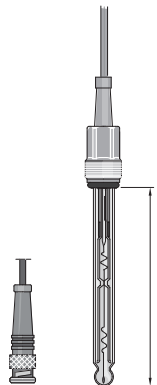


### Type PHED 112 FE

Type	Cable length	Connector	Part No.
PHED 112 FE 303 B	9.8 ft. (3 m)	BNC	741038

Further types on request.

# ProMinent® DULCOTEST Sensors

## Temperature Sensors



pk\_6\_026

Temperature range: 0...100 °C  
 Max. pressure: 10 bar  
 Typical applications: Temperature measurement and pH temperature correction

Pt 100 SE  
 Pt 1000 SE


**Part No.**  
 305063  
 1002856

## ORP Identcode Description

Identity Code Description (Type description)

RHEX	Pt	SE
ORP-combination probe		<b>E:</b> internal mounting thread PG 13.5
<b>X:</b> with solid electrolyte and circular gap diaphragm		<b>S:</b> connector for SN6 coax plug
<b>K:</b> with strong plastic shaft		<b>Pt:</b> Platinum electrode (pin)
<b>P:</b> pressure tight to 87 psi (6 bar)		<b>Au:</b> Gold electrode (pin)
<b>R:</b> with PTFE ring diaphragm		
<b>N:</b> refillable KCl electrode		
<b>S:</b> swimming pool electrode		
unspecified: standard gel-filled electrode		

## ORP Combination Sensors With SN6



pk\_6\_031

### RHES-Pt-SE

Temperature: 32-140 °F (0-60 °C)  
 Max. pressure: 7.3 psi (0.5 bar)  
 Min. conductivity: >150 µS/cm  
 Diaphragm: Ceramic  
 Installation length: 4.72" (120 ±3 mm)  
 Typical applications: Swimming pool, atmospheric pressure installation, potable water, lightly contaminated water


RHES-Pt-SE

**Part No.**  
 150703

## ProMinent® DULCOTEST Sensors

### ORP Combination Sensors With SN6

pk\_6\_035



#### RHEP-Pt-SE


Temperature: 32-176 °F (0-80 °C)  
 Max. pressure: 87 psi (6 bar)  
 Min. conductivity: >150 µS/cm  
 Diaphragm: Ceramic  
 Installation length: 4.72" (120 ±3 mm)  
 Mounting hole: min. Ø 0.57" (14.5 mm)

Typical applications: Swimming pools under pressure, potable and industrial water, lightly soiled wastewater, the electroplating and chemical industries, for higher temperatures and pressures.  
 Not suitable for media containing ozone

**Part No.**

RHEP-Pt-SE 150094

pk\_6\_034



#### RHER-Pt-SE


Temperature: 32-176 °F (0-80 °C)  
 Max. pressure: 87 psi (6 bar)  
 Min. conductivity: >50 µS/cm  
 Electrolyte with KCl supplement (salt rings in the reference electrolyte)  
 Diaphragm: PTFE ring diaphragm  
 Installation length: 4.72" (120 ±3 mm)

Typical applications: Municipal and industrial waste water, drinking and industrial water, chemical industry, paper manufacture, food industry. General, for water with distinct suspended solid content.

**Part No.**

RHER-Pt-SE 1002534

pk\_6\_033



#### RHEX-Pt-SE

Temperature: 32-212 °F (0-100 °C)  
 Max. pressure: 232 psi (16 bar) at 77 °F (25 °C); 87 psi (6 bar) at 212 °F (100 °C)  
 Min. conductivity: >500 µS/cm  
 Diaphragm: circular gap (solid electrolyte)  
 Installation length: 4.72" (120 ±3 mm)


Typical applications: Waste water, industrial water, process chemistry, emulsions, suspensions, fluids containing protein and sulphite (not chlorine/fluoride or when subject to temperature fluctuations). General, for water with high suspended solid content.  
 Not suitable for clear media

**Part No.**

RHEX-Pt-SE 305097

# ProMinent® DULCOTEST Sensors

## ORP Combination Sensors With SN6

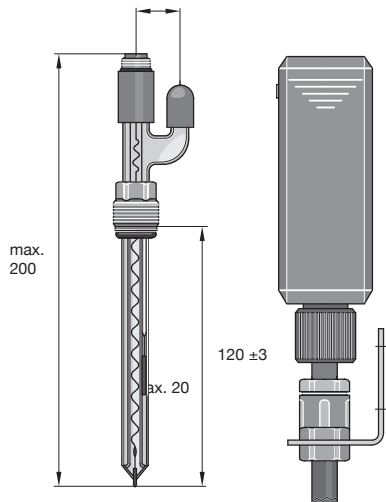


### RHEN-Pt-SE

Temperature: 32-176 °F (0-80 °C)  
 Max. pressure: Atmospheric pressure operation  
 Min. conductivity: >150 µS/cm  
 Diaphragm: Ceramic  
 KCl electrolyte, refillable  
 Installation length: 4.72" (120 ±3 mm)  
 Typical applications: Waste water  
 Supplied without PE storage container and tubing

	Part No.
RHEN-Pt-SE	305091
<b>Accessories:</b>	
PE storage container with connectors and tubing	305058
We recommend installation approx. 1.6 - 3.3 ft. (0.5-1 m) above sample fluid level.	
KCl solution 3 molar 250 ml	791440
KCl solution 3 molar 1000 ml	791441

## ORP Sensors With Fixed Cable

Series	
RHE	ORP sensor
<b>Properties</b>	
K	Plastics shaft
<b>Electrode material</b>	
Pt	Platinum
<b>Electrical connection to electrode</b>	
F	Fixed cable electrode
<b>Internal thread</b>	
E	internal thread PG 13.5
<b>Cable diameter</b>	
3	cable diameter 0.12" (3 mm)
5	cable diameter 0.20" (5 mm)
<b>Cable length</b>	
01	cable length in meters
<b>Electrical connection at device</b>	
S	SN6
D	DIN
B	BNC
<b>RHE</b>	<b>K Pt F E 3 1 S</b>

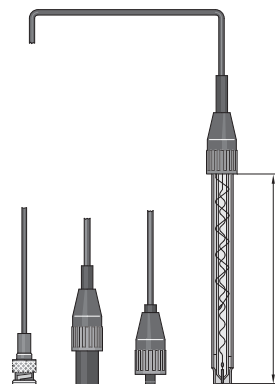

### Type RHES-Pt-F

ORP combination probes with Pt electrode probe gel-filled, with glass shaft, without internal mounting thread.

Type	Cable length	Connector	Part No.
RHES-Pt-F 303 B	9.8 ft. (3 m)	BNC	304983

### Type RHEK-Pt-F


ORP sensor with plastic shaft, Pt electrode with cover.  
 Fixed coax cable and device plug, no internal mounting thread.

Type	Cable length	Connector	Part No.
RHEK-Pt-F 301 S	3 ft. (1 m)	SN6	304997

# ProMinent® DULCOTEST Sensors

## Fluoride Sensors

DULCOTEST Sensors fluoride electrodes are ion-selective electrodes based on the potentiometric measurement principle. They are designed for determining the concentration of fluoride anions in aqueous solutions. These electrodes have been optimised for use in monitoring the fluoridation of potable water in waterworks. Corresponding conditions must be observed.

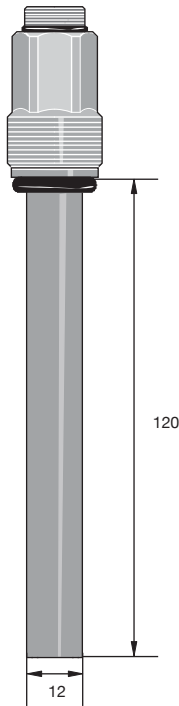

pk\_6\_095

### FLEP 010

A 4-20 mA measurement transducer, a reference electrode and a temperature sensor for temperature compensation are required as well as the fluoride electrode. Measured variable: Fluoride ion concentration

- Reference method: photometric, see section 5.4.5: DT2A and DT2B photometers
- Measurement range with measurement transducer: 0.05-10.00 mg/l
- pH range: 5.5-9.5
- Temp. range: 34-95 °F (1-35 °C)
- Max. Pressure: 100 psi (no pressure surges)
- Intake flow: recommended 5.3 gph (20 l/h); 2.6-26.4 gph (10 - 200 l/h)
- Conductivity range: > 100 µS/cm
- Response time T95 (open): < 30 s (for conc. > 0.5 ppm)
- Enclosure rating: IP 65
- Shelf life: approx. 6 months
- Length when fitted: 4.72" (120 mm)
- Shaft diameter: 0.472" (12 mm)
- Typical application: monitoring the fluoridation of potable water
- Measurement and control equipment: D1C
- in-line probe housing: DLG IV

**Part No.**

FLEP 010 (fluoride sensor)*	1028279
-----------------------------	---------

**Accessories**

4-20 mA measurement transducer FPV1**	1028280
Sensor cable	7740215
Reference electrode, REFP-SE	1018458
Temperature sensor, Pt 100	305063
Polishing paste	559810

\* replaces fluoride sensor (part no. 1010311)

\*\* replaces transducer (part no. 1009962)

# ProMinent® DULCOTEST Sensors

## Overview: Amperometric Sensors

For optimum functioning of chlorine, bromine, chlorine dioxide and ozone sensors please note the following guidelines:

- Use DULCOMETER measurement and control systems.
- Install only in ProMinent® DGM or DLG III in-line probe fittings.
- Defined flow between 7.9-15.8 gph (30-60 l/h).
- Chlorine measurement must only take place when pH is stable.
- Regular calibration with a Photometer (e.g. Type DT 1).

### Important:

Amperometric sensors are not electrically isolated. When installing in external appliances (e.g. PLC), you should electrically isolate the supply voltage and the analog input signal.

### Summary of features:

- High zero point stability
- Compact design
- Integrated temperature correction
- Simple to install
- Simple to maintain
- Short running-in period
- Measurement signal virtually unaffected by flow

Measured variable	Applications	Graduated measuring range	DULCOMETER®	Sensor type
Free chlorine	Drinking water, swimming pool	0.01–100 ppm	D1C, DAC	CLE 3-mA-xppm, CLE 3.1-mA-xppm
Free chlorine	Drinking water, swimming pool water, in situ electrolysis (without diaphragm)	0.02-10 ppm	D1C, DAC	CLO 1-mA-xppm
Free chlorine	Hot water up to 70 °C (legionella), in situ electrolysis (without diaphragm)	0.02-2 ppm	D1C, DAC	CLO 2-mA-2ppm
Free chlorine	Drinking water, swimming pool	0.01–50 ppm	DMT	CLE 3-DMT-xppm, CLE 3-CAN-xppm, CLE 3.1-CAN-xppm
Free chlorine	Drinking water, swimming pool	0.01–10 ppm	DULCOMARIN® II	CLB 2-µA-xppm
Free chlorine	Drinking water, swimming pool	0.05-5 ppm	COMPACT	
Free chlorine	Cooling water, process water, waste water, water with higher pH values (stable)	0.01-10 ppm	D1C, DAC	CBR 1-mA-xppm
Total available chlorine	Swimming pool water with chlorine-organic disinfectants	0.02–10 ppm	D1C, DAC	CGE 2-mA-xppm
Total available chlorine	Swimming pool water with chlorine-organic disinfectants	0.01–10 ppm	DULCOMARIN® II	CGE 2- CAN-xppm
Total chlorine	Drinking, service, process and cooling water	0.01–10 ppm	D1C, DAC	CTE 1-mA-xppm
Total chlorine	Drinking, service, process and cooling water	0.01–10 ppm	DMT	CTE 1-DMT-xppm
Total chlorine	Drinking, service, process and cooling water	0.01–10 ppm	DULCOMARIN® II	CTE 1-CAN-xppm
Combined chlorine	Swimming pool water	0.02–2 ppm	DAC	CTE 1-mA-2 ppm + CLE 3.1-mA-2 ppm
Combined chlorine	Swimming pool water	0.01–10 ppm	DULCOMARIN® II	CTE 1-CAN-xppm + CLE 3.1-CAN-xppm
Total available bromine	Cooling water, swimming pool water, whirl-pool water, bromine with bromorganic disinfectants (e.g. BCDMH)	0.2–10 ppm	D1C, DAC	BRE 1-mA-xppm
Total available bromine	Cooling water, swimming pool water, whirl-pool water, bromine with inorganic bromine compounds (e.g. NaBr/HOCl)	0.2–10 ppm	D1C, DAC	BRE 2-mA-xppm
Total available bromine	Cooling water, swimming pool water, whirl-pool water with bromorganic or inorganic bromine compounds	0.02-10 ppm	DULCOMARIN® II	BRE 3-CAN-10 ppm
Free and bound bromine	Cooling water, process water, waste water, water with higher pH values (stable)	0.02-20 ppm	D1C, DAC	CBR 1-mA-xppm

# ProMinent® DULCOTEST Sensors

## Overview: Amperometric Sensors

Measured variable	Applications	Graduated measuring range	Connection to DULCOMETER®	Sensor type
Chlorine dioxide	Drinking water	0.01–10 ppm	D1C, DAC, DULCOMARIN® II	CDE 2-mA-xppm
Chlorine dioxide	Bottle washer system	0.02–2 ppm	D1C, DAC, DULCOMARIN® II	CDP 1-mA
Chlorine dioxide	Hot water up to 60 °C, cooling water, waste water, irrigation water	0.01-10 ppm	D1C, DAC, DULCOMARIN® II	CDR 1-mA-xppm
Chlorite	Drinking, wash water	0.02–2 ppm	D1C, DAC, DULCOMARIN® II	CLT 1-mA-xppm
Ozone	Drinking, service, process, swimming pool water	0.02–2 ppm	D1C, DAC	OZE 3-mA-xppm
Dissolved oxygen	Drinking, surface water	2–20 ppm	D1C, DAC	DO 1-mA-xppm
Dissolved oxygen	Activated sludge tank, sewage treatment plant	0.1–10 ppm	D1C, DAC	DO 2-mA-xppm
Peracetic acid	CIP, antiseptic food filling process	1–2,000 ppm	D1C, DAC	PAA 1-mA-xppm Perox sensor
Hydrogen peroxide	Clear water, fast control	1–2,000 ppm	PEROX controller	PEROX-H2.10-P
Hydrogen peroxide	Process, swimming pool water	0.5–2,000 ppm	D1C, DAC	PER1-mA-xppm

## Overview: Amperometric Sensors Selection Guide


		Selection Guide							
		CLE 3	CLE 3.1	CLO 1	CLO 2	CLB 2	CBR 1	CGE 2	CTE 1
<b>Measured variable</b>	Free chlorine	x	x	x	x	x	x		
	Total available chlorine (cyanuric acid derivatives)							x	x
	Total chlorine							x	x
<b>Selectivity of free chlorine</b>	raised		x						
	yes	x		x	x	x	x		
	no							x	x
<b>Application</b>	Public swimming pools	x	x			x		(x)	
	Private swimming pools	x	x	x		x		x	
	Drinking water	x	x		x	x			x
	Cooling water						x		x
	Waste water						x		x
<b>Disinfectant</b>	chlorine gas, hypochlorite, electrolysis with diaphragm	x	x	x	x	x	x		x
	electrolysis without diaphragm			x	x	x			
	chlorine-containing cyanuric acid derivatives							x	
<b>Specifications</b>	Measuring range [ppm]	0.01-100	0.01-10	0.02-2	0.02-2	0.05-5	0.01-10	0.02-10	0.01-10
	pH range	5.5-8	5.5-8	5-9	5-9	5-9	5-9.5	5.5-9.5	5.5-9.5
	Temperaturer (°F)	41-113	41-113	41-113	41-158	41-113	41-113	41-113	41-113
	(°C)	5-45	5-45	5-45	5-70	5-45	5-45	5-45	5-45
	Max. pressure [bar]	1	1	8	8	8	1	3	3
<b>Installation</b>	open outlet	x	x	x	x	x	x	x	x
	direct installation in the circuit			x	x	x			

Note: Interference, such as film-forming substances, chemical residue, flow, conductivity

product overview  
solenoid-driven metering pumps  
motor-driven metering pumps  
pump spare parts & accessories  
DULCOMETER instrumentation  
DULCOTEST sensors  
polymer blending & dry feed solutions

# ProMinent® DULCOTEST Sensors

## Chlorine Sensors

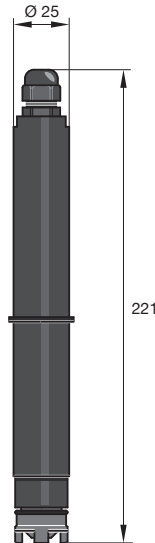


pk\_6\_039

### Measurement of free chlorine

#### CLE 3-mA

Measured variable:	<b>Free chlorine (hypochlorous acid HOCl)</b>
Analysis:	DPD 1
pH range:	5.5-8.0 (up to pH 8.5 with D1C pH correction)
Temperature range:	41-113 °F (5-45 °C) temperature compensated
Max. pressure:	14.5 psi (1 bar)
Flow:	7.9-14.9 gph (30-60 l/h) in DGM or DLG III
Power supply:	16-24 V DC (two-wire technology)
Output signal:	4-20 mA = measurement range (un-calibrated) <b>Warning:</b> no electrical isolation!
Typical applications:	CLE 3-mA-0.5 ppm, potable water CLE 3-mA-2/5/10 ppm, swimming pool, potable, industrial, process water (surfactant free)
Measurement and control devices:	D1C, DAC, DULCOMARIN® (2/10 ppm only)
In-line probe housing:	DGM, DLG III

	<b>Part No.</b>
CLE 3-mA-0.5 ppm set, with 100 ml electrolyte	792927
CLE 3-mA-2 ppm set, with 100 ml electrolyte	792920
CLE 3-mA-5 ppm set, with 100 ml electrolyte	1033392
CLE 3-mA-10 ppm set, with 100 ml electrolyte	792919
CLE 3-mA-20 ppm set, with 100 ml electrolyte	1002964
CLE 3-mA-50 ppm set, with 100 ml electrolyte	1020531
CLE 3-mA-100 ppm set with 100 ml electrolyte	1022786

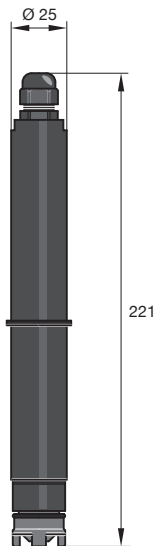

pk\_6\_039

#### CLE 3.1-mA


Measured variable:	<b>free chlorine (hypochlorous acid HOCl) where there is a high rate of combined chlorine and/or in the case of pH values up to 8.5 (with D1C pH correction)</b>
Reference method:	DPD1
Measurement range:	0.01-0.50 mg/l (CLE 3.1-mA-0.5 ppm) 0.02-2.00 mg/l (CLE 3.1-mA-2 ppm) 0.01-5.00 mg/l (CLE 3.1-mA-5 ppm) 0.1-10.0 mg/l (CLE 3.1-mA-10 ppm)
pH range:	5.5-8.0 (up to pH 8.5 with D1C pH correction)
Temp. range:	41-113 °F (5-45 °C) temperature compensated
Max. pressure:	14.5 psi (1 bar)
Inflow:	7.9-14.9 gph (30-60 l/h) in the DGM or DLG III
Supply voltage:	16-24 V DC (two wire technology)
Output signal:	4-20 mA = measurement range (uncalibrated) <b>Important:</b> not electrically isolated!
Typical applications:	swimming pool, industrial and process water with higher proportions of combined chlorine and/or higher pH values to pH 8.5
Measurement and control equipment:	D1C, DAC, DULCOMARIN®
In-line probe housing:	DGM, DLG III

	<b>Part No.</b>
CLE 3.1-mA-0.5 ppm set, with 100 ml electrolyte	1020530
CLE 3.1-mA-2 ppm set, with 100 ml electrolyte	1018369
CLE 3.1-mA-5 ppm set, with 100 ml electrolyte	1019398
CLE 3.1-mA-10 ppm set, with 100 ml electrolyte	1018368



## ProMinent® DULCOTEST Sensors

### Chlorine Sensors

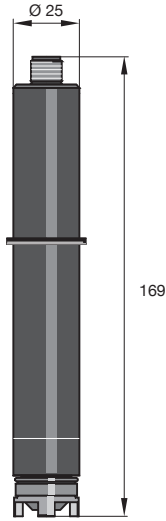

pk\_6\_038

#### CLE 3-DMT


Measuring cell for use with the DMT “chlorine” measurement transducer.

Measured variable:	<b>Free chlorine (hypochlorous acid HOCl)</b>
Reference method:	DPD1
Measurement range:	0.01-5.0 mg/l 0.05-50 mg/l
Supply:	From the DMT measurement transducer (3.3 VDC)
Output signal:	Un-calibrated, not temperature compensated
Temp. measurement:	Via integrated Pt 1000: compensation carried out in DMT
Measuring cell output:	5-pin plug
Other data as for CLE-3 mA.	

#### Part No.

CLE 3-DMT-5 ppm set with 100 ml electrolyte	1005511
CLE 3-DMT-50 ppm set with 100 ml electrolyte	1005512

**Note:** You require assembly kit (Part No. 815079) for the initial installation of the chlorine sensors into the DLM III in-line probe housing.

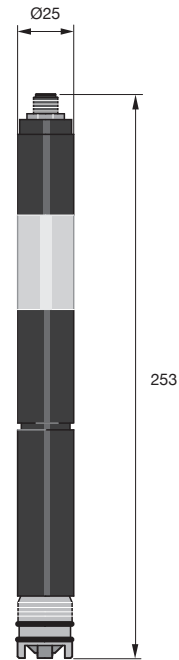

pk\_6\_096

#### CLE 3-CAN

Sensors for connection to a CAN interface (e.g. DULCOMARIN® II swimming pool controller)

Measured variable:	<b>free chlorine (hypochlorous acid)</b>
Reference method:	DPD 1
Measurement range:	0.01 -10 mg/l
Power supply:	via CAN interface (11-30 V)
Temperature measurement:	via installed digital semiconductor element
Output signal:	uncalibrated, temperature compensated, electrically isolated
Compatibility:	CAN-Open bus systems
Additional data see CLE 3-mA	


#### Part No.

CLE 3-CAN-10 ppm set with 100 ml electrolyte	1023425
--	---------

**Note:** You require assembly kit (Part No. 815079) for the initial installation of the chlorine sensors into the DLM III in-line probe housing.

# ProMinent® DULCOTEST Sensors


## Chlorine Sensors

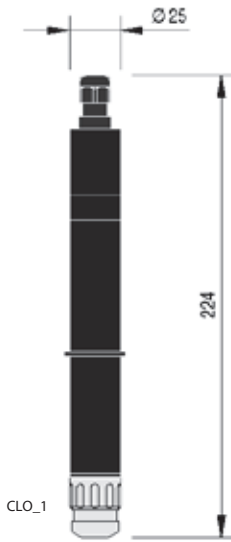

### CLO 1-mA

Measured variable: **Free chlorine (hypochlorous acid HOCl)**  
 Reference method: DPD1  
 pH range: 5-9  
 Temperature: 41-113 °F (5-45 °C)  
 Max. pressure: 116 psi (8 bar)  
 Intake flow: 7.9-15.9 gph (30-60 l/h) (in DGM or DGL III), constant flow as flow-dependent signal  
 Power supply: 16-24 V DC (2-wire)  
 Output signal: 4-20 mA = Measuring range, temperature-compensated, uncalibrated, not electrically isolated  
 Typical applications: Swimming pool, uncontaminated drinking water and industrial service water, and can also be used together with diaphragm-free electrolysis processes  
 Measurement and control equipment: D1C, DAC  
 In-line probe fitting: DGM, DLG III to 140 °F (60 °C), special fitting for 140-158 °F (60-70 °C) on request  
 Measuring principle: amperometric, 3 electrodes, no diaphragm

	Measuring range	Part No.
CLO 1-mA-2 ppm	0.02-2.0 ppm	1033871
CLO 1-mA-2 ppm	0.10-10.0 ppm	1033870

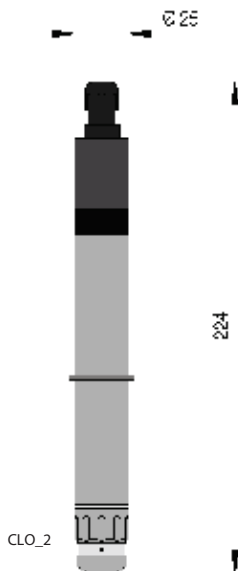


### CLO 2-mA

Measured variable: **Free chlorine (hypochlorous acid HOCl)**  
 Reference method: DPD1  
 pH range: 5-9  
 Temperature: 41-158 °F (5-70 °C)  
 Max. pressure: 116 psi (8 bar)  
 Intake flow: 7.9-15.9 gph (30-60 l/h) (in DGM or DGL III), constant flow as flow-dependent signal  
 Power supply: 16-24 V DC (2-wire)  
 Output signal: 4-20 mA = Measuring range, temperature-compensated, uncalibrated, not electrically isolated  
 Typical applications: Hot water up to 158 °F (70 °C), combatting legionella, uncontaminated drinking water and industrial service water, can, also be used together with diaphragm-free electrolysis processes  
 Measurement and control equipment: D1C, DAC  
 In-line probe fitting: DGM, DLG III to 140 °F (60 °C), special fitting for 140-158 °F (60-70 °C) on request  
 Measuring principle: amperometric, 3 electrodes, no diaphragm

	Measuring range	Part No.
CLO 2-mA-2 ppm	0.02-2.0 ppm	1033878

# ProMinent® DULCOTEST Sensors


## Chlorine Sensors

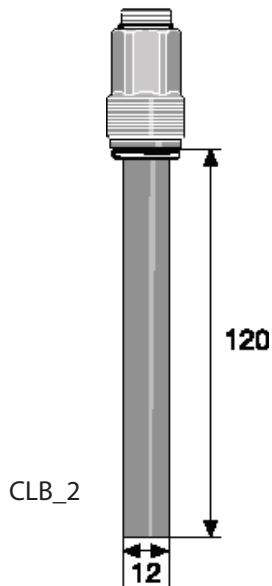

### CLB 2-µA

Measured variable:	<b>Free chlorine (hypochlorous acid HOCl)</b>
Reference method:	DPD1
pH range:	5-9
Temperature:	41-113 °F (5-45 °C)
Max. pressure:	116 psi (8 bar)
Intake flow:	7.9-15.9 gph (30-60 l/h) (in DGM or DGL III), constant flow needed as flow-dependent signal
Power supply:	16-24 V DC (2-wire)
Output signal:	Non-amplified primary current signal, non-temperature-compensated, uncalibrated, not electrically isolated
Typical applications:	Private swimming pool, can also be used together with Diaphragm-free electrolysis processes for the generation of chlorine
Measurement and control equipment:	Compact controller
In-line probe fitting:	DGM, DLG III
Measuring principle:	amperometric, 3 electrodes, no diaphragm

	<b>Measuring range</b>	<b>Part No.</b>
CLB 2-µA-5 ppm	0.05-5.0 ppm	1038902

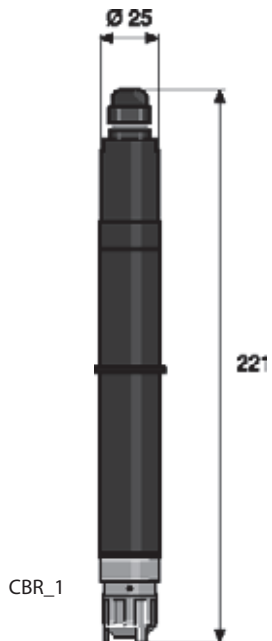


### CBR 1-mA

Measured variable:	<b>Free chlorine (hypochlorous acid HOCl), free bromine, bound-bromine</b>
Reference method:	DPD1
pH range:	5-9.5
Temperature:	41-113 °F (5-45 °C)
Max. pressure:	14.5 psi (1 bar)
Intake flow:	7.9-15.9 gph (30-60 l/h) (in DGM or DGL II)
Power supply:	16-24 V DC (2-wire)
Output signal:	4-20 mA = Measuring range, temperature-compensated, uncalibrated, not electrically isolated
Typical applications:	Cooling water, Process water, Waste water, Water with high higher pH values (stable pH)
Measurement and control equipment:	D1C, DAC
In-line probe fitting:	DGM, DLG III
Measuring principle:	amperometric, 2 electrodes, diaphragm-covered

	<b>Measuring range</b>	<b>Part No.</b>
CBR 1-mA-0.5 ppm	0.01-.5 ppm	1038016
CBR 1-mA-2 ppm	0.02-2 ppm	1038015
CBR 1-mA-10 ppm	0.10-10 ppm	1038014

# ProMinent® DULCOTEST Sensors

## Chlorine Sensors

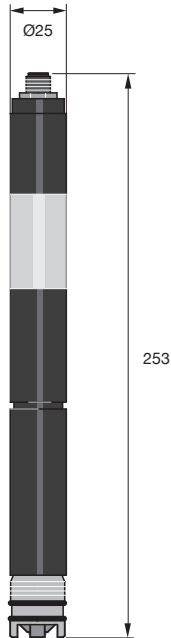

pk\_6\_096

### CLE 3.1-CAN

Sensor for connection to a CAN interface (e.g. DULCOMARIN® II swimming pool controller)

Measured variable: **free chlorine (hypochlorous acid) with high proportion of bound chlorine and/or pH value up to 8.5 (with pH correction via D1C)**

Reference method: DPD 1

Measurement range: 0.01 -10 mg/l

Power supply: via CAN-interface (11-30 V)

Temperature measurement: via installed digital semiconductor element

Output signal: uncalibrated, temperature compensated, electrically isolated

Compatibility: CAN-Open bus systems

Additional data see CLE 3.1-mA

#### Part No.

CLE 3.1-CAN-10 ppm set with 100 ml electrolyte 1023426

**Note:** You require assembly kit Part No. 815079 for the initial installation of the chlorine sensors into the DLM III in-line probe housing.

### Measured variable of organic combined chlorine and free chlorine (total available chlorine)

#### CGE 2-mA

Measured variable: **Total available chlorine: sum of organically combined chlorine (e.g. combined in cyanuric acid) and free chlorine**

Reference method: DPD1

Measurement range: 0.02-2.00 mg/l (CGE 2-mA-2 ppm)

0.1-10.0 mg/l (CGE 2-mA-10 ppm)

pH range: 5.5-9.5

Temperature range: 41-113 °F (5-45 °C) temperature compensated

Max. pressure: 43.5 psi (3 bar)

Flow: 7.9-15.9 gph (30-60 l/h) in DGM or DLG III

Power supply: 16-24 V DC (two-wire technology)

Output signal: 4-20 mA = measurement range (un-calibrated)

**Warning:** no electrical isolation!

Typical applications: Swimming pools and in water with high pH-value


Measurement and control devices: D1C, DAC, DULCOMARIN®

In-line probe housing: DGM, DLG III

#### Part No.

CGE 2-mA-2 ppm set, with 50 ml electrolyte 792843


CGE 2-mA-10 ppm set, with 50 ml electrolyte 792842

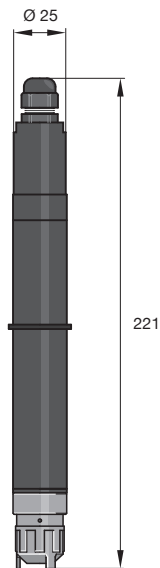

pk\_6\_040

# ProMinent® DULCOTEST Sensors

## Chlorine Sensors

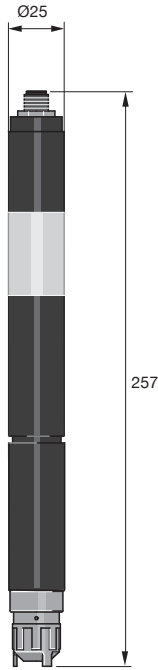

pk\_6\_084

### CGE 2-CAN

Probe for connection to a CANopen interface (e.g. DULCOMARIN® II swimming pool controller)

Measured variable: **total available chlorine: sum of organically combined chlorine (e.g. combined in cyanuric acid) and free chlorine**

Reference method: DPD1

Range: 0.01-10.00 ppm

pH range: 5.5-9.5

Temp. range: 5-45 °C (temperature compensated)

Max. pressure: 3 bar

Incident flow; 30-60 l/h (with DGMa or DLG III)

Supply: via CAN interface (11-30 V)

Temperature measurement: via built-in digital semiconductor device

Output signal: calibrated, temperature-compensated, electrically-isolated


Compatibility: CANopen bus systems

See CGE 2-mA for other information

**Part No.**

CGE 2-CAN-10 ppm c/w with 100 ml of electrolyte 1024420

**Note:** a mounting kit (Part No. 815079) is required for the initial installation of the chlorine probe in the DLG III in-line probe housing.

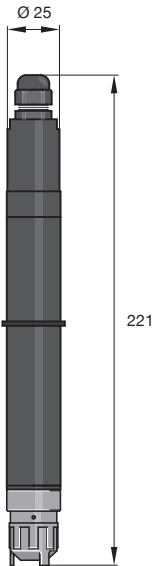

pk\_6\_040

### Measured variable of total chlorine

#### CTE 1-mA

Measured variable: **total chlorine**

Reference method: DPD4

Measurement range: 0.01...0.50 mg/l (CTE 1-mA-0.5 ppm)  
0.02... 2.00 mg/l (CTE 1-mA-2 ppm)  
0.05... 5.00 mg/l (CTE 1-mA-5 ppm)  
0.1...10.0 mg/l (CTE 1-mA-10 ppm)

pH range: 5.5...9.5

Temperature range: 5...45 °C (temperature compensated)

Max. pressure: 3 bar

Flow: 30...60 l/h (in DGM or DLG III)

Power supply: 16...24 V DC (two-wire technology)

Output signal: 4...20 mA = measurement range (un-calibrated)

**Warning:** no electrical isolation!

Typical applications: CTE 1-mA-0.5 ppm, potable water  
CTE 1-mA-2/5/10 ppm: Potable, process, industrial and cooling water. In swimming pools in combination with CLE 3.1 for determining combined chlorine.

Measurement and control devices: D1C, DAC, DULCOMARIN® (2/10 ppm only)


In-line probe housing: DGM, DLG III

**Part No.**

CTE 1-mA-0.5 ppm set, with 50 ml electrolyte	740686
CTE 1-mA-2 ppm set, with 50 ml electrolyte	740685
CTE 1-mA-5 ppm set, with 50 ml electrolyte	1003203
CTE 1-mA-10 ppm set, with 50 ml electrolyte	740684
CTE 1-mA-20 ppm set, with 50 ml electrolyte	7792910
Viton O-ring for CTE membrane cap	7781269

# ProMinent® DULCOTEST Sensors

## Chlorine Sensors

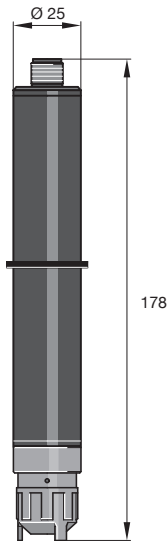

pk\_6\_015

### CTE 1-DMT


Measuring cell for use with the DMT "chlorine" measurement transducer.

Measured variable: **Total chlorine**  
 Reference method: DPD4  
 Measurement range: 0.01-10.0 mg/l  
 Power supply: From the DMT measurement transducer (3.3 VDC)  
 Output signal: Un-calibrated, not temperature compensated  
 Temperature measurement: Via integrated Pt 1000: compensation carried out in DMT  
 Sensor output: 5-pin plug  
 Other data as for CTE 1 mA

**Part No.**

CTE 1-DMT-10 ppm set with 50 ml electrolyte **1007540**

**Note:** An assembly set 815079 is required for DLG III for initial installation of chlorine measuring cells.

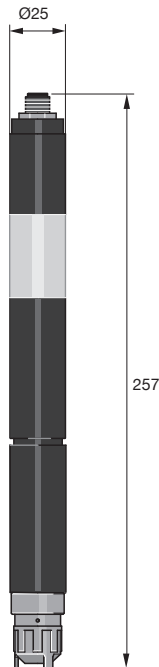

pk\_6\_084

### CTE 1 -CAN

Sensor for connection to a CAN interface

Measured variable: **total chlorine**  
 Reference method: DPD 4  
 Measurement range: 0.01 -10 mg/l  
 Power supply: via CAN interface (11-30 V)  
 Temperature measurement: via installed digital semiconductor element  
 Output signal: uncalibrated, temperature compensated, electrically isolated  
 Compatibility: CAN-Open bus systems  
 Additional data see CLE 3-mA


**Part No.**

CTE 1-CAN-10 ppm set with 100 ml electrolyte **1023427**

**Note:** You require assembly kit (Part No. 815079) for the initial installation of the chlorine sensors into the DLM III in-line probe housing

# ProMinent® DULCOTEST Sensors

## Bromine Sensors

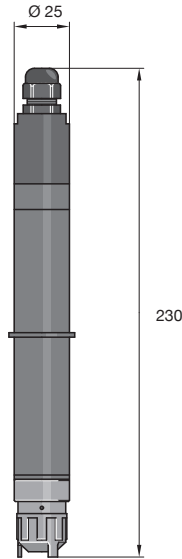

pk\_6\_074

The following bromating agents are used as disinfectants:

**Organic brominating agent**

- a) DBDMH (1.3-dibrom-5.5-dimethyl-hydantoin) e. g. sold as Albrom 100®
- b) BCDMH (1-bromine-3-chlorine-5.5-dimethyl-hydantoin) e.g. sold as Brom-Sticks®

These bromating agents are solid and are metered as saturated solutions via brominators.

**Inorganic free bromine**

For measuring DBDMH or free bromine as a bromating agent in the measurement range: 0.2 -10 ppm bromine the BRE 2-mA-10 ppm sensor is recommended along with DPD1-method calibration.

Alternatively, to measure BCDMH in the same measurement range, the BRE 1-mA-10 ppm sensor is recommended along with DPD4-method calibration.

Typical applications are in swimming pools, Jacuzzis and cooling systems. Particularly in cooling systems the quality of the sample water must be tested and, where applicable, compatibility with other chemicals employed (e.g. corrosion inhibitors). Dissolved copper (>0.1 mg/l) will interfere with the measurement.

Photometric DPD measurement is the recommended method for calibrating the bromine sensor (e.g. with DT 1), calculated and displayed as bromine. If bromine is determined as “chlorine” with DPD, note when selecting the measurement range that you need to lower the result by a factor of 2.25.

**Bromine measured variable**

Measured variable:	<b>Total available bromine (free and organic bound bromine)</b>
Bromine chemicals:	DBDMH (1.3-dibromine 5.5-dimethyl hydantoin) BCDMH (1-bromine-3-chlorine-5.5-dimethyl hydantoin), free bromine
Reference method:	DBDMH, free bromine: DPD1 BCDMH: DPD4
Measurement range:	DBDMH free bromine: 0.2-10.0 mg/l with type BRE 2-mA-10 ppm BCDMH: 0.2-10.0 mg/l with type BRE 1-mA-10 ppm
pH dependence:	if pH 7 changes to pH 8 the sensor sensitivity is reduced accordingly a) in the case of DBDMH and free bromine by approx. 10 % b) in the case of BCDMH by approx. 25 %
Temperature range:	41-113 °F (5-45 °C)
Max. pressure:	43.5 psi (3 bar)
Sample flow:	7.9-15.9 gph (30-60 l/h) in DGM or DLG III
Voltage:	16-24 V DC (two-wire technology)
Output signal:	4-20 mA = measurement range (not calibrated) <b>Warning:</b> not electrically isolated!
Typical applications:	Swimming pools / whirlpools and cooling water; can also be used in seawater
Measurement and control device:	D1C, DAC
In-line probe housing:	DGM, DLG III

	<b>Part No.</b>
BRE 1-mA-2 ppm kit with 50 ml electrolyte	1006894
Measurement range relates to BCDMH	
BRE 1-mA-10 ppm kit with 50 ml electrolyte	1006895
Measurement range relates to BCDMH	
BRE 2-mA-10 ppm kit with 50 ml electrolyte	1020529
Measurement range relates to DBDMH, free bromine	
BRE 1-mA-0.5 ppm kit with 50 ml electrolyte	1041697
BRE 2-mA-2 ppm kit with 50 ml electrolyte	1033391


Note: Requires assembly kit (Part No. 815079) for the initial installation of the bromine sensors into the DLM III in-line probe housing. Signal leads, see sensor technology accessories.

# ProMinent® DULCOTEST Sensors

## Chlorine Dioxide Sensor Overview

Sensor type	CDE 2-mA	CDE 3-mA	CDP 1-mA	CDR 1-mA
<b>Application</b>	Drinking water	Hot water circuits	Bottle Washer system	Cooling water, waste water, Agriculture
<b>Measurement range</b>	0.01-10	0.01-0.50	0.02-2	0.01-10
<b>Temperature</b>	41-113 °F (5-45 °C)	41-140 °F (5-60 °C)	50-113 °F (10-45 °C)	33.8-131 °F (1-55 °C)
<b>Max. pressure</b>	14.5 psi (1.0 bar)	14.5 psi (1.0 bar)	43.5 psi (3.0 bar)	43.5 psi (3.0 psi)
<b>pH range</b>	4-11	4-11	5.5-10.5	1.0-10.0
<b>Response time</b>	120 sec	120 sec	60 sec	180 sec
<b>Run-in time</b>	2-6 hrs	2-6 hrs	4-12 hrs	2-6 hrs
<b>Surfactant-resistance</b>	no	no	yes	yes
<b>Contamination resistance</b>	no	no	under certain conditions	yes
<b>Cross sensitivity</b>	CDE <2% to Chlorine and Ozone interference			

## Chlorine Dioxide Sensors

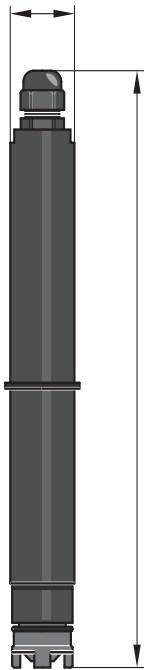

### CDE 2-mA

Measured variable:	Chlorine dioxide (ClO <sub>2</sub> )
Reference method:	DPD1
Measurement range:	0.01 - 0.50 mg/l (CDE 2-mA-0.5 ppm) 0.02-2.00 mg/l (CDE 2-mA-2 ppm) 0.1-10.0 mg/l (CDE 2-mA-10 ppm)
Cross sensitivity:	to chlorine <2 %
pH range:	ClO <sub>2</sub> stability range
Temperature range:	5-41-113 °F (45 °C) temperature compensated, no significant temperature fluctuations
Max. pressure:	14.5 psi (1 bar)
Flow:	7.9-15.9 gph (30-60 l/h) in DGM or DLG III
Power supply:	16-24 V DC (two-wire technology)
Output signal:	4-20 mA = measurement range (un-calibrated)
	<b>Warning:</b> no electrical isolation!
Typical applications:	Potable, industrial, process water (surfactant free)
Measurement and control device:	D1C, DAC
In-line probe housing:	DGM, DLG III

	Part No.
CDE 2-mA-0.5 ppm set, with 100 ml electrolyte	792930
CDE 2-mA-2 ppm set, with 100 ml electrolyte	792929
CDE 2-mA-10 ppm set, with 100 ml electrolyte	792928

**Note:** You require assembly kit (Part No. 815079) for the initial installation of the chlorine sensors into the DLM III in-line probe housing.

### CDE 2.1-mA

Technical data: as Type CDE 2-mA, but maximum temperature 140 °F (60 °C)  
Typical application: chlorine dioxide treatment to combat legionella

### CDE 2.1-mA

0.5 ppm comes complete with 100 ml of electrolyte


Order on request

Note: a mounting kit (Part No. 815079) is required for the initial installation of the Chlorine dioxide probe in the DLG III in-line probe housing.



## ProMinent® DULCOTEST Sensors

### Chlorine Dioxide Sensors

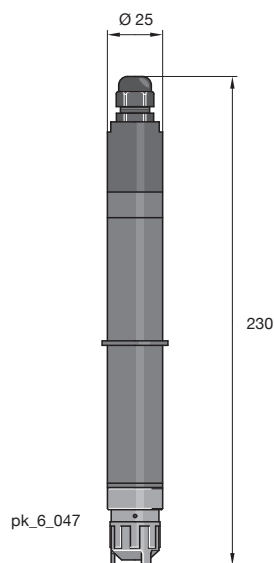

#### CDP 1-mA-2 ppm (ClO<sub>2</sub>-process probe)

<b>Applications:</b>	Bottle washing machines and water containing surfactants
Measured variable:	<b>Chlorine dioxide (ClO<sub>2</sub>)</b>
Reference method:	DPD1
Measurement range:	0.02-2.00 mg/l
pH range:	5.5-10.5
Temperature range:	50-113 °F (10-45 °C) short term periods 131 °F (55 °C) with <b>external temperature correction</b> via <b>Pt 100</b> (no internal temperature correction!)
Temperature variation speed:	Up to 10 K/min
Max. pressure:	43.5 psi (3 bar) no pressure surges
Flow:	7.9-15.9 gph (30-60 l/h) in DGM
Supply voltage:	16-24 V DC (two-wire technology)
Output signal:	4-20 mA = measurement range (un-calibrated) <b>Warning:</b> no electrical isolation!
Type application:	Process water containing surfactants (bottle washing machines)
Measuring and control device:	<b>D1C, DAC with automatic temperature compensation only</b>
In line probe housing:	DGM, DLG III Probe housing quote on request.

	<b>Part No.</b>
CDP 1-mA-2 ppm set with 100 ml electrolyte	1002149

**Note:** You require assembly kit (Part No. 815079) for the initial installation of the chlorine dioxide sensors into the DLM III in-line probe housing.


# ProMinent® DULCOTEST Sensors

## Chlorine Dioxide Sensors

### CDR 1-mA-2 ppm

Measured variable: **Chlorine dioxide (ClO<sub>2</sub>)**  
 Reference method: DPD1  
 pH range: 1-10  
 Temperature range: 1-131 °F (-17-7 °C) short term periods 140 °F (60 °C)  
 Max. pressure: 44 psi (3 bar) no pressure surges  
 Responses time T<sub>90</sub>: 2-3 min  
 Intake flow: 8-16 gph (30-61 l/h)  
 Supply Voltage: 16-24 VDC  
 Output signal: 4-20 mA (temperature compensated, not calibrated)  
 Measuring and control device: D1C, DAC  
 In line probe housing: DGMa / DLGIII

	Measuring ranges	Part No.
CDR 1-mA-0.5 ppm	0.01-0.50 ppm	1033762
CDR 1-mA-2 ppm	0.02-2.00 ppm	1033393
CDR 1-mA-10 ppm	0.01-10 ppm	1033404

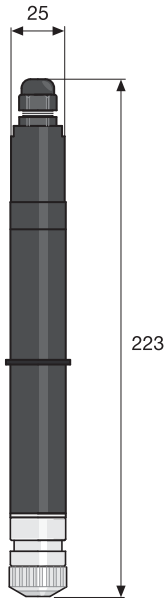


pk\_6\_083

## Chlorite Sensors

### Measured variable chlorite CLT 1-mA

Measured variable: **chlorite anion (ClO<sub>2</sub><sup>-</sup>)**  
 Reference method: DPD method  
 Chlorite in presence of chlorine dioxide  
 Measurement range: 0.020-0.500 mg/l (CLT 1-mA-0.5 ppm)  
 0.10-2.00 mg/l (CLT 1-mA-2 ppm)  
 pH range: 6.5-9.5  
 Temp. Range: 33.8-104 °F (1-40 °C) temperature compensated  
 max. pressure: 1 bar  
 Intake flow: 7.9-15.9 gph (30-60 l/h) in DGM or DLG III  
 Power supply: 16-24 V DC (two-wire)  
 Output signal: 4-20 mA = measurement range (uncalibrated)  
**Important** not electrically isolated!  
 Model Use: Monitoring potable water treated with chlorine dioxide or similar. Selective measurement of chlorite in presence of chlorine dioxide, chlorine and chlorate is also possible.  
 Measurement and control equipment: D1C, DAC  
 In-line probe housing: DGM, DLG III

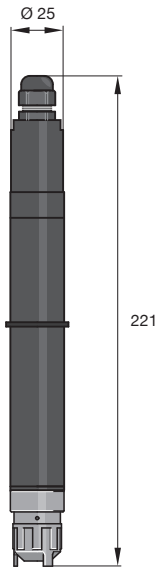

pk\_6\_040


	Part No.
CLT 1-mA-0.5 ppm set with 50 ml electrolyte	1021596
CLT 1-mA-2 ppm set with 50 ml electrolyte	1021595

Note: You require assembly kit (Part No. 815079) for the initial installation of the chlorite sensors into the DLM III in-line probe housing.

We recommend the DT4 photometer for calibration of the chlorite sensor.

## ProMinent® DULCOTEST Sensors

### Ozone Sensors

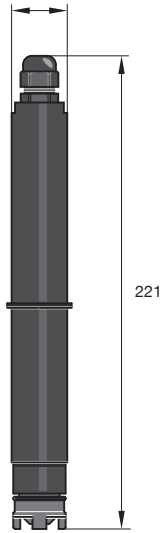

#### OZE 3-mA

Measured variable:	<b>Ozone (O<sub>3</sub>)</b>
Reference method:	DPD4
Measurement range:	0.02-2.00 mg/l
pH range:	Ozone stability range
Temperature range:	41-104 °F (5-40 °C) temperature compensated, no significant Temperature fluctuations
Max. pressure:	1 bar
Flow:	7.9-15.9 gph (30-60 l/h) in DGM or DLG III
Power supply:	16-24 VDC (two-wire technology)
Output signal:	4-20 mA = measurement range (un-calibrated) <b>Warning:</b> no electrical isolation!
Typical applications:	Swimming pools, potable, industrial, process water, surfactant free
Measurement and control devices:	D1C, DAC
In-line probe housing:	DGM , DLG III

#### Part No.

OZE 3-mA-2 ppm set, with 100 ml electrolyte


792957

**Note:** You require assembly kit Part No. 815079 for the initial installation of the ozone sensors into the DLM III in-line probe housing.


pk\_6\_039

# ProMinent® DULCOTEST Sensors

## Dissolved Oxygen Sensors

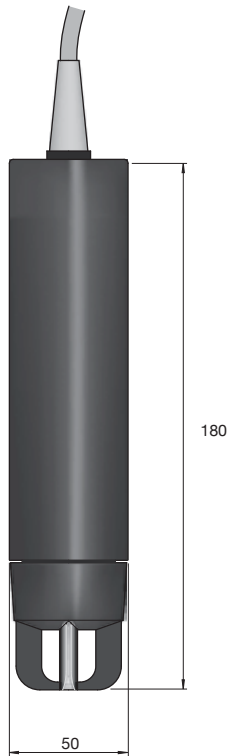

pk\_6\_050\_1

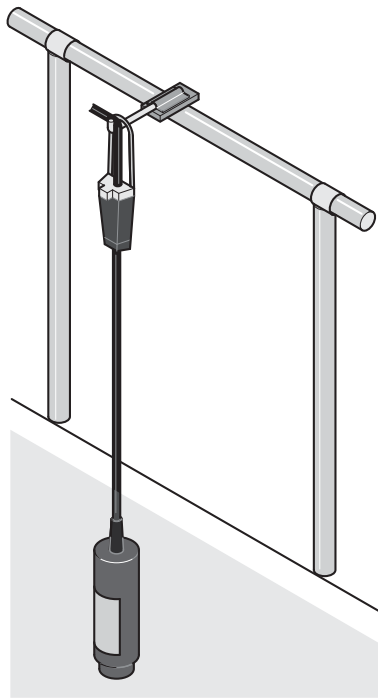

pk\_6\_011

The measured variable “dissolved oxygen” gives the quantity of the gaseous physical dissolved oxygen in its aqueous phase in mg/l (ppm).

The “dissolved oxygen” is thereby an important parameter for controlling the quality of surface water and water which needs to be oxygenated for use in aqua culture and aqua zoos. The dissolved oxygen is also used to control processes in sewage plants and waterworks.

The following sensors are assigned to the different applications and can be supplied separately as 4-20 mA-transmitters to central controllers or together with the D1C as a stand alone solution.

### DO 1-mA

<b>Measured variable:</b>	dissolved oxygen
<b>Calibration:</b>	of oxygen in air
<b>Measurement range:</b>	0-20 mg/l
<b>Reproducibility of measurement:</b>	± 0.5 % of measurement limit value
<b>Temp. range:</b>	32-122 °F (0 -50 °C)
<b>Max. pressure:</b>	14.5 psi (1 bar)
<b>Velocity of sample water:</b>	minimum: 0.16 ft./s (0.05 m/s)
<b>Enclosure rating:</b>	IP 68
<b>Power supply:</b>	12-30 V DC
<b>Output signal:</b>	4-20 mA. Measurement range calibrated, temperature corrected and electrically isolated
<b>Process integration:</b>	<ul style="list-style-type: none"> <li>a) immersion, suspended on cable with or without mountain bracket for cable</li> <li>b) Immersion of immersion pipe                             <ul style="list-style-type: none"> <li>1. Immersion pipe with 1.97“ (50 mm) outside diameter and 1-1/4“ (31.75 mm ) internal thread (provided by the customer). Connection via immersion pipe adapter</li> <li>2. PVC immersion pipe with 1.97“ (50 mm) outside diameter (provided by the customer). Connection via standard PVC adhesive union (provided by the customer).</li> </ul> </li> <li>c) In-flow operation to order</li> </ul>

### Typical applications


Fish and shrimp farming. Conditioning of water in large aquaria in zoological systems. Control of oxygen input in waterworks Appraisal of the biological status of surface waters

DO 1-mA-20 ppm

**Part No.**  
1020532

# ProMinent® DULCOTEST Sensors

## Dissolved Oxygen Sensors

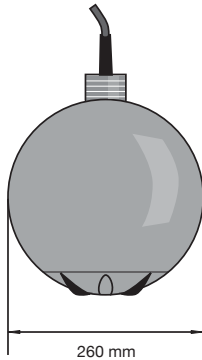

pk\_6\_051

### DO 2-mA


<b>Measured variable:</b>	dissolved oxygen
<b>Calibration:</b>	of oxygen in air
<b>Measurement range:</b>	0-10 mg/l
<b>Reproducibility of measurement:</b>	± 0.5 % of measurement limit value
<b>Temp. Range:</b>	32-122 °F (0 -50 °C)
<b>Max. pressure:</b>	14.5 psi (1 bar)
<b>Velocity of sample water:</b>	minimum: 0.16 ft./s (0.05 m/s)
<b>Enclosure rating:</b>	IP 68
<b>Supply voltage:</b>	12-30 V DC
<b>Output signal:</b>	4-20 mA. Measurement range calibrated, temperature corrected and electrically isolated

**Process integration:** as float with venturi grooves to increase the flow of sample water for the self-cleaning of the sensor part. Supplied with adapter for connection to PVC-pipes with outside diameter: 1.97" (50 mm) and railing bracket, also for PVC pipes with outside diameter: 1.97" (50 mm). The customer must provide the straight PVC tube and a 45 ° standard elbow for gluing to PVC pipes (outside diameter 50 mm).

**Typical application** Control of the oxygen input in activated sludge pools (sewage plant) for the purpose of energy conservation

DO 2-mA-10 ppm

**Part No.**  
1020533

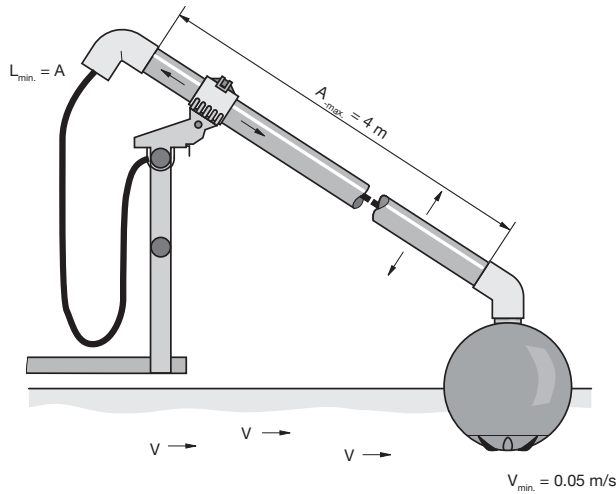

pk\_6\_012

# ProMinent® DULCOTEST Sensors

## Dissolved Oxygen Sensors

### DO 3-mA


<b>Measured variable:</b>	dissolved oxygen
<b>Calibration:</b>	on atmospheric oxygen or by reference measurement in the process water
<b>Measurement accuracy:</b>	±0.1 ppm (mg/l)
<b>Response time sensor <math>t_{90}</math>:</b>	< 60 S at 77 °F (25 °C) from air to nitrogen
<b>Temperature:</b>	32-122 °F (0 -50 °C)
<b>Temperature correction:</b>	integrated Pt1000, fed to the outside
<b>Max. pressure:</b>	29 psi (2 bar)
<b>Intake flow:</b>	measurement even possible without flow
<b>Supply voltage:</b>	18-30 V DC
<b>Electrical connection:</b>	Fixed cable, 32.8 Ft (10 m)
<b>Output signal:</b>	4-20 mA. Measurement range calibrated, temperature corrected and galvanically isolated
<b>Process integration:</b>	<b>a)</b> Immersion by immersion pipe (PVC, d40/DN 32, provided by the customer). The connection is possible using the immersion pipe adapter (reducing nipple, order no. 356924) and the 45° angle (order no. 356335). Both parts are included in the scope of delivery: and can be ordered as an accessory (also see Accessories). <b>b)</b> Installation into ProMinent bypass fittings, type DGMa with mounting kit 791818 and type DLG III with mounting kit 815079
<b>Measuring &amp; control equipment:</b>	DACb as of firmware 02.01.01.02 with complete calibration functionality and all correction variables (temperature, salinity, air pressure, height above sea level). Displayed units: [ppm] and [% oxygen saturation] DACa, AEGIS II, D1C: calibration only possible by the input of a reference concentration determined from the process water. Only temperature correction variable. Displayed unit: [ppm]
<b>Typical applications:</b>	Control of oxygen input into the aeration tank (clarification plant), control of oxygen input in water works, breeding of fish and shrimps, conditioning of the water of large aquaria in zoos, assessment of the biological condition of surface water.
<b>Resistance to:</b>	Contaminated water and the following chemical compounds: carbon dioxide, hydrogen sulfide, sulfur dioxide, ethylene oxide and against gamma sterilization.
<b>Interference by:</b>	Oxidant (e.g. chlorine, chlorine dioxide, ozone) and many organic solvents (e.g. chloroform, toluene, acetone)
<b>Measuring principle, technology:</b>	Optical: Measurement of the relaxation time of a pulsed fluorescence beam

	Part No.
DO 2-mA-10 ppm	1020533



## ProMinent® DULCOTEST Sensors

### Peracetic Acid Sensors

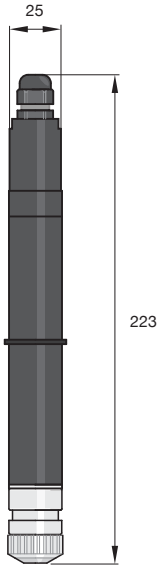

pk\_6\_083

The DULCOTEST Sensors PAA 1 sensor models are membrane-covered amperometric 2-electrode sensors for the selective measurement of peracetic acid. Peracetic acid is used as a disinfectant particularly in the food and beverage industries as well as in the cosmetic, pharmaceutical and medical industries. The continuous measurement and control of the peracetic acid is essential to comply with demanding disinfection requirements and for quality control. Unlike with the sensors in the earlier Perox PES system the PAA 1-mA can be used with the D1Ca controller. Commissioning and maintenance is greatly simplified. The sensors can even be used in the presence of surfactants (tensides).

#### PAA 1-mA

Measured variable:	<b>peracetic acid</b>
Reference method:	titration
Measurement range	10-200 mg/l (PAA 1-mA-200 ppm) 100-2000 mg/l (PAA 1-mA- 2000 ppm)
pH range:	1-9 (peracetic acid stability range)
Temp. range:	33.8113 °F (1-45 °C) temperature compensated
Admissible temperature fluctuation:	0.3 °/min
Response time $T_{90}$	3 min.
Max. Pressure.:	43.5 psi (3 bar) at 86 °F (30 °C), in DGM
Intake flow:	7.9-15.9 gph (30- 60 l/h) with DGM or DLG III in-line probe housing
Power supply	16-24 V DC (two wire)
Output signal:	4-20 mA measurement range (uncalibrated) <b>Important</b> not electrically isolated
Typical application:	scouring in Cleaning in Place (CIP) and rinsing systems, also designed for use in the presence of cationic and anionic tensides. Selective measurement of peracetic acid as well as hydrogen peroxide is possible.
Measurement and control equipment:	D1C, DAC
In-line probe housing:	DGM, DLG

	<b>Part No.</b>
PAA 1-mA-200ppm	1022506
PAA 1-mA-2000ppm	1022507

# ProMinent® DULCOTEST Sensors

## Hydrogen Peroxide Sensors

The DULCOTEST Sensors PEROX and PER1 probes are membrane-covered amperometric sensors for online determination of hydrogen peroxide concentration. Because it is totally biologically degradable, hydrogen peroxide is frequently used as a disinfectant and oxidant in water treatment and production:

- Chemical bleaching in the timber, paper, textile and mineral salt industries
- Organic synthesis in the chemical, pharmaceutical and cosmetics industries
- Oxidation of drinking water, landfill seepage water, contaminated ground water
- Disinfection of cooling water, service water and production water in the pharmaceutical and food and beverages industries, and in swimming pools
- Deodorization (gas scrubber) in municipal and industrial wastewater purification plants
- Dechlorination in chemical processes

Sensors are selected using the following decision table:

Requirement	Type	Type
	PER1	PEROX
Probe matrix contaminated by dirt or chemicals	suitable due to impermeable diaphragm	more susceptible due to permeable diaphragm
Electrical interference due to interference potentials in the measured medium	immune as counter electrode is separated from process	more susceptible as counter electrode is in the medium
Temperature range	up to 122 °F (50 °C)	up to 104 °F (40 °C)
Ease of handling during installation and maintenance	suitable due to temperature compensation and transducer integrated in sensor	separate temperature sensor and transducer
Response time for H <sub>2</sub> O <sub>2</sub> for fast control	sluggish T <sub>90</sub> = 6-8 min	fast T <sub>90</sub> = 20 s
Rapid temperature changes	sluggish due to integrated temperature sensor	fast due to separate temperature sensor
Long process cycles with no H <sub>2</sub> O <sub>2</sub> present	unsuitable	suitable due to pulsed polarisation technology
Range can vary in phases by several orders of magnitude, or is not clear at time of ordering	selection of suitable sensor necessary	suitable as range can be manually selected at the sensor transducer
Cost per channel	lower	higher



# ProMinent® DULCOTEST Sensors

## Hydrogen Peroxide Sensors

### Operating conditions


Requirement	Type <b>PER1</b>	Type <b>PEROX</b>
Measured variable	hydrogen peroxide	hydrogen peroxide
Calibration	photometric with DT4 hand-held photometer, see Chap. 5.4.4	photometric with DT4 hand-held photometer, see Chap. 5.4.4
Ranges	2.0-200.0 mg/l 20-2.000 mg/l different sensors	1-20, 10-200, 100-2000 selectable
pH range	2.5-11	2.5-10
Temperature	0-50 °C	0-40 °C (0-30 °C at > 1.000 ppm)
Permissible temperature changes	< 0.3 °C/min	< 1 °C/min (with external temp. measurement) see O.I.
Sensor response time	T <sub>90</sub> approx. 480 sec	T <sub>90</sub> approx. 20 sec
Reproducible accuracy	≥1 ppm or better than ± 5% of measured value	better than 5 % referred to range full scale value
Min. conductivity	0.05-5.00 mS/cm	with 20 mg/l range: 5 µS/cm 200 mg/l range: 200 µS/cm up to 1.000 mg/l: 500 µS/cm up to 2.000 mg/l: 1 mS/cm
Sampled water flow	5.3-26.4 gph (20-100 l/h) with DGMA	15.9 gph (60 l/h) recommended
Max. operating pressure	0-14.5 psi (0-1 bar)	29 psi (2 bar)
Supply	16-24 VDC (2-wire system)	16-24 VDC (3-wire system)
Output signal	4-20 mA, temperature compensated, uncalibrated, not electrically isolated	4-20 mA, temperature compensated, uncalibrated, not electrically isolated
Typical applications	swimming pool, treatment of contaminated wastewater, treatment of process media from production	treatment of clear and chemically uncontaminated water, control systems with necessarily short response times
Measurement and control device	DAC...H 7	DAC...H 1
In-line probe housing	DGM, DLG	DGM, DLG

### Part No.

Perox sensor PEROX-H2.10-P	792976
Perox transducer PEROX-micro-H1.20-mA	1034100
PER 1- mA - 200 ppm	1022509
PER - mA - 2000 ppm	1022510
PER 1- mA - 50 ppm	1030511

# ProMinent® DULCOTEST Sensors


## Conductivity Sensors

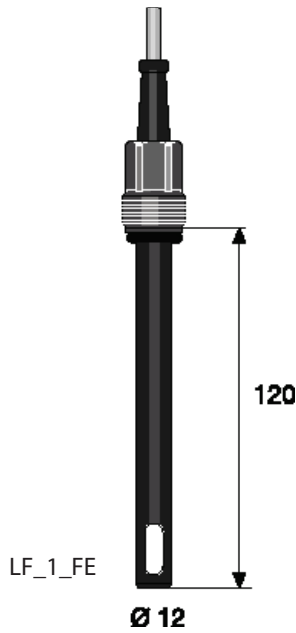

### LF 1 FE

Measurement range:	0.01-20 mS/cm
Cell constant k:	1 cm <sup>-1</sup> ± 5%
Temperature compensation:	-
Fluid temperature:	32-176 °F (0-80 °C)
Max. pressure:	232 psi (16 bar)
Electrode material:	Special graphite
Shaft material:	Epoxy
Thread:	PG 13.5
Installation length:	120 ± 3 mm
Electrical connection:	5 m fixed cable (2 x 0.5 mm <sup>2</sup> )
Typical applications:	Drinking, cooling, industrial water. The sensors in the LF series are not wholly suitable for the measurement of cleaning solutions containing surfactants or liquids containing solvents.

	Part No.
LF 1 FE	741152

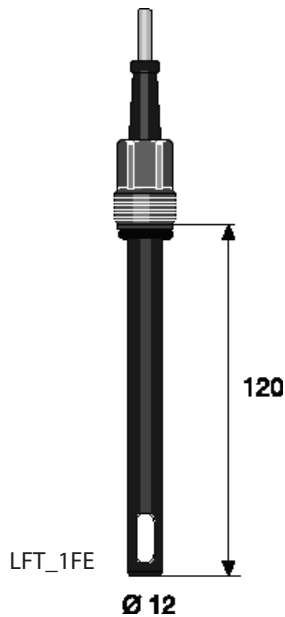


### LFT 1 FE

Measurement range:	0.01-20 mS/cm
Cell constant k:	1 cm <sup>-1</sup> ± 5%
Temperature compensation:	Pt 100
Fluid temperature:	32-176 °F (0-80 °C)
Max. pressure:	232 psi (16 bar)
Electrode material:	Special graphite
Shaft material:	Epoxy
Thread:	PG 13.5
Installation length:	120 ± 3 mm
Electrical connection:	5 m fixed cable (2 x 0.5 mm <sup>2</sup> )
Typical applications:	Drinking, cooling, industrial water. The sensors in the LF series are not wholly suitable for the measurement of cleaning solutions containing surfactants or liquids containing solvents.

	Part No.
LFT 1 FE	1001374

# ProMinent® DULCOTEST Sensors

## Conductivity Sensors

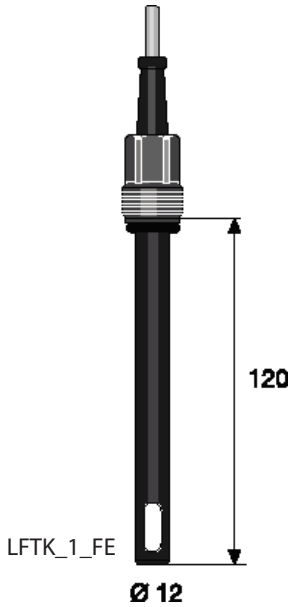

### LFTK 1 FE


Measurement range:	0.01-20 mS/cm
Cell constant k:	1 cm <sup>-1</sup> ± 5%
Temperature compensation:	Pt 1000
Fluid temperature:	32-176 °F (0-80 °C)
Max. pressure:	232 psi (16 bar)
Electrode material:	Special graphite
Shaft material:	Epoxy
Thread:	PG 13.5
Installation length:	120 ± 3 mm
Electrical connection:	5 m fixed cable (2 x 0.5 mm <sup>2</sup> )
Typical applications:	Drinking, cooling, industrial water. The sensors in the LF... series are not wholly suitable for taking measurements in cleaning solutions containing surfactants or liquids containing solvents

LFTK 1 FE

Part No.

1046132

## Measuring Points for Turbidity

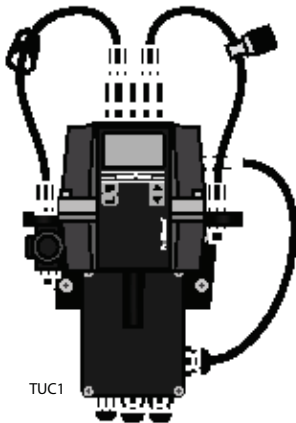

The new DULCOTEST Sensors measuring points for turbidity in the DULCO turb C range with versions TUC1, TUC2, TUC3 and TUC4, are compact online turbidity measuring points, consisting of a sensor, inline flow fitting and measuring device. The measuring device permits the measured value to be displayed, calibration, transmission of the measured value via a 4-20 mA signal and the indication of limit value transgressions and device faults. The measuring cuvette integrated in the measuring device enable the device to operate in the bypass of the process line. The visual measuring unit does not come into contact with the sample medium.

The intended application is the treatment of drinking water, whereby the DULCO turb C can be used in all treatment stages of raw water, from filter monitoring to measurement of fine turbidity in dispensed drinking water. It is also possible to monitor the turbidity of slightly contaminated process water and waste water, as well as treated water from the food and beverage industry up to a turbidity value of 1,000 NTU. Compared with the TUC 1 / TUC 2, the measuring stations TUC 3 / TUC 4 include an ultrasound-based self-cleaning function. This helps in particular to extend the service intervals particularly when used with the types of water that form films.

The measuring principle is identical to light scatter measurements. The light beam that is beamed into the measuring cuvette filled with sample water is dispersed on turbidity particles and the scattered light is measured at right angles (90°) to the beamed in light (Nephelometric measurement). The measuring unit for the turbidity measurement can be given as NTU (Nephelometric Turbidity Unit) or as FNU (Formazin Nephelometric Unit). The measuring process of types TUC1/TUC3 (infrared light) corresponds to the globally applicable standard ISO 7027 and the European Standard DIN EN 27027. The measuring process of types TUC3/TUC4 (achromatic light) corresponds to the US American standard USEPA 180.1.

# ProMinent® DULCOTEST Sensors

## Measuring Points for Turbidity

<b>Measurement range:</b>	0 ... 1,000.0 NTU
<b>Accuracy</b>	± 2 % of the displayed value or ± 0.02 NTU below 40 NTU, depending on which value is the greater ± 5 % of the displayed value above 40 NTU
<b>Resolution:</b>	0.0001 NTU below 10 NTU
<b>Response time:</b>	configurable
<b>Display:</b>	Multiple row LCD display with background lighting
<b>Alarm relay:</b>	Two programmable alarms, 120-240 VAC, 2 A Form C relay
<b>Output signal:</b>	4-20 mA, 600 Ω, not electrically isolated: dual-isolated, degree of interference, overvoltage category II
<b>Communication interface:</b>	Bi-directional RS-485, Modbus
<b>Max. pressure:</b>	Integrated pressure regulating valve regulates 1380 kPa (200 psi), based on the flow rate Flow 1.6-15.9 gph (6 – 60 l/h)
<b>Temperature:</b>	33.8-122 °F (1-50 °C)
<b>Material that contacts with the media:</b>	Polyamide (PA), silicone, polypropylene (PP), stainless steel, borosilicate glass
<b>Voltage supply:</b>	100 - 240 VAC, 47-63 Hz, 80 VA
<b>Ambient conditions:</b>	Not suitable for outdoor use Maximum altitude 1.24 miles above sea level Maximal 95 % relative air humidity (non-condensing).
<b>Enclosure rating:</b>	IP 66
<b>Standard:</b>	USEPA 180.1 with the "Infrared" version, ISO 7027 or DIN EN 27027 with the "Achromatic light" version
<b>Dimensions H x W x D:</b>	34" x12" x 12" (35 x 30 x 30 cm)
<b>Shipping weight:</b>	5.5 lbs. (2.5 kg)

	Standard	Ultrasonic cleaning	Part no.
<b>TUC 1</b>	Infrared: ISO 7027, DIN EN 27027	No	1037696
<b>TUC 2</b>	Achromatic light: US EPA 180.1	No	1037695
<b>TUC 3</b>	Infrared: ISO 7027, DIN EN 27027	Yes	1037698
<b>TUC 4</b>	Achromatic light: US EPA 180.1	Yes	1037697

### Spare parts

	Part no.
<b>Drying agent</b>	1037701
<b>Cuvette TUC 1 / TUC 2</b>	1037877
<b>Cuvette TUC 3 / TUC 4</b>	1037878
<b>Infrared lamp TUC 1 / TUC 3</b>	1037702
<b>Achromatic light lamp TUC 2 / TUC 4</b>	1037703
<b>Hose kit</b>	1037879
<b>Pressure regulating valve</b>	1037885

### Accessories

	Part no.
<b>Calibration set</b>	1037699
<b>Flow control</b>	1037880

# Sensor Accessories

## Measurement Transmitter 4 - 20 mA (Two Wire)

### Advantages:


- Safer signal transfer, even across large distances
- Interference free 4-20 mA signal
- Simple installation directly onto sensor

**Typical applications:** Measurement signal transfer over large distances, or to transfer signals subject to disturbance (e.g. pH, redox) in conjunction with D1C, D2C and DULCOMARIN® measurement and control systems, or for direct connection to PC/PLC.

### pH measurement transmitter 4-20 mA, type pH V1

Measurement range: pH 0...14  
 Accuracy: better than pH 0.1 (typical ±pH 0.07)  
 Socket: SN6  
 Input resistance:  $10^{12} \Omega$   
 Signal output: 4...20 mA  $\approx$  -500...+500 mV  $\approx$  pH 15.45 - -1.45  
 not calibrated, not electrically isolated  
 Power supply: 18...24 V DC  
 Ambient temperature: -5...50 °C, non-condensing  
 Enclosure rating: IP 65  
 Dimensions: 141 mm length, 25 mm  $\varnothing$

**Part No.**  
809126

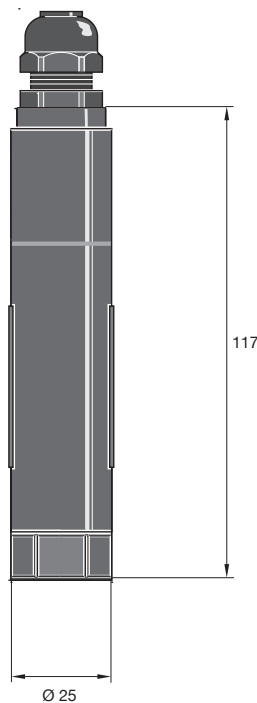

pk\_5\_064

### Redox measurement transmitter 4-20 mA, type RH V1

Technical data as for pH transmitter, but:  
 Measurement range: 0...1000 mV  
 Accuracy: better than ±0.5 mV (typical ±3 mV)  
 Input resistance:  $> 5 \times 10^{11} \Omega$   
 Signal output: 4...20 mA  $\approx$  0...+1000 mV  
 not electrically isolated

**Part No.**  
809127


### Temperature measurement transmitter 4-20 mA, type Pt 100 V1

Technical data as for pH transmitter, but:  
 Measurement range: 0...100 °C  
 Accuracy: better than ±0.5 °C (typical ±0.3 °C)  
 Input resistance:  $\sim 0 \Omega$   
 Signal output: 4...20 mA  $\approx$  0...+100 °C  
 not electrically isolated

**Part No.**  
809128

# Sensor Accessories

## Signal Cables

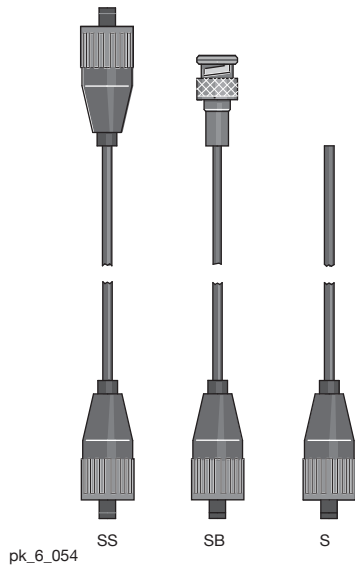


### General guidelines:

- Ensure that signal leads are as short as possible.
- Ensure signal leads are separated from power cables running parallel to them.
- Use pre-assembled combined signal leads wherever possible.

### Signal leads for pH/ORP measurement

- Pre-assembled to facilitate installation
- Factory tested to ensure function reliability
- IP 65


Design	Description	Part No.
2 x SN6	coax Ø 5 mm 3 ft. (0.8 m) - SS	305077
	coax Ø 5 mm 6 ft. (2.0 m) - SS	304955
	coax Ø 5 mm 15 ft. (5.0 m) - SS	304956
	coax Ø 5 mm 30 ft. (10.0 m) - SS	304957
SN6 - open end	coax Ø 5 mm 6 ft. (2.0 m) - S	305030
	coax Ø 5 mm 15 ft. (5.0 m) - S	305039
	coax Ø 5 mm 30 ft. (10.0 m) - S	305040
SN6 - BNC	coax Ø 3 mm 30 ft. (10.0 m) - SB	305099



### Signal leads for electrodes with Vario Pin plug

Pre-assembled 6-core signal lead with Vario Pin plug for connection to electrode type PHEPT 112 VE.

	Part No.
Vario Pin signal lead VP 6-ST/ 2 m	1004694
Vario Pin signal lead VP 6-ST/ 5 m	1004695
Vario Pin signal lead VP 6-ST/10 m	1004696

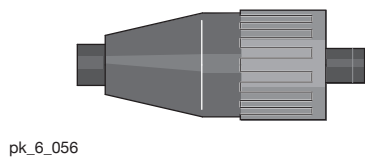

### SN6 coax connector

K 74 crimping pliers and a soldering iron are required for connecting coax connectors to cables.

	Part No.
SN6 coaxial plug for 5 mm Ø coaxial signal lead	304974
SN6 coaxial plug for 3 mm Ø coaxial signal lead	7304975



### LK coax signal cable

For pH and ORP measurements.

	Part No.
Coax low noise 5 mm Ø, black	723717
Coax low noise 3 mm Ø, black	723718

\*\*Please specify length with order.\*\*

# Sensor Accessories

## Signal Cables



pk\_1\_085

### Signal leads for DMT type chlorine measuring cells

The signal lead is required for connection of DMT type measuring cells to the DMT transducer.

		Part No.
Universal cable, 5-pin round plug; 5-core	6 ft. (2 m)	1001300
Universal cable, 5-pin round plug; 5-core	15 ft. (5 m)	1001301
Universal cable, 5-pin round plug; 5-core	30 ft. (10 m)	1001302

### Cable accessories for CAN-type chlorine sensors

	Part No.
T-distributors M12 5 pole CAN	1022155
Moving load M12-joint	1022154
Moving load M12-plug	1022592
Connecting cable - CAN M12 5 pole 0.5 m	1022137
Connecting cable - CAN M12 5 pole 1 m	1022139
Connecting cable - CAN M12 5 pole 2 m	1022140
Connecting cable - CAN M12 5 pole 5 m	1022141
Connecting cable - CAN, sold in meters	1022160
Plug-CAN M12 5 pole Screw terminal	1022156
Coupling-CAN M12 5 pole Screw terminal	1022157

### Signal leads for Pt 100/Pt 1000 (2 x 0.5 mm<sup>2</sup>)



pk\_6\_054

	Part No.
Length 15 ft. (5 m) SN6 - open ended	1003208
Length 30 ft. (10 m) SN6 - open ended	1003209
Length 60 ft. (20 m) SN6 - open ended	1003210

### Sensor adapters

	Part No.
SN6 male to BNC male	7305024
SN6 female to BNC female	7305065
SN6 male to SN6 male	7305025

### LKT signal lead for conductivity measuring cells

4-core, shielded, Ø 6.2 mm



pk\_6\_055

	Part No.
Please specify length with order.	723712

### Two-wire signal lead (2 x 0.25 mm<sup>2</sup>; Ø 4 mm)

For -mA type chlorine/bromine/chlorine dioxide/ozone measuring cells and pH, ORP; Pt 100, conductivity transducers.

	Part No.
Please specify length with order.	7740215


# Sensor Accessories

## Buffer Solutions

### pH Quality Buffer Solutions

Accuracy  $\pm$ pH 0.02 ( $\pm$ 0.05 at pH 10). The shelf life depends upon frequency of use and the amount of chemical drag-in.

Alkaline buffer solutions can react with CO<sub>2</sub> if left open. This will affect their values, therefore close after use. Buffer solutions should be replaced a maximum of three months after opening. The solution contains a biocide to prevent bacteria forming.

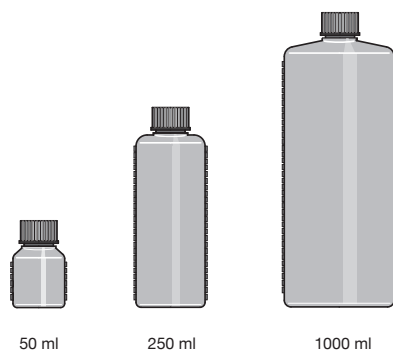


	Capacity	Part No.
pH 4.0 buffer - red color	50	506251
pH 4.0 buffer - red color	250	791436
pH 4.0 buffer - red color	1,000	506256
pH 5.0 buffer - red color	50	506252
pH 7.0 buffer - green color	50	506253
pH 7.0 buffer - green color	250	791437
pH 7.0 buffer - green color	1,000	506258
pH 9.0 buffer - colorless	50	506254
pH 9.0 buffer - colorless	1,000	506259
pH 10.0 buffer - blue color	50	506255
pH 10.0 buffer - blue color	250	791438
pH 10.0 buffer - blue color	1,000	506260

### ORP Quality Buffer Solutions

Accuracy  $\pm$  5 mV. Their shelf life depends on how often they are used and how strong the carry-over of chemicals is.

Buffer solutions should be replaced a max. of 3 months after first opening.


**Important: The ORP buffer solution 465 mV is an irritant!**

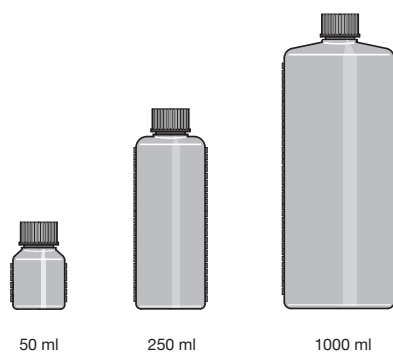

	Capacity	Part No.
ORP buffer 465 mV	50	506240
ORP buffer 465 mV	250	791439
ORP buffer 465 mV	1,000	506241
ORP buffer 220 mV	50	506244
ORP buffer 220 mV	1,000	506245

### 3 Molar KCl Solutions

3-molar KCl solution is most suited for the storage of pH and ORP sensors (e.g., in sensor quills) and as an electrolyte for refillable sensors (e.g., PHEN, RHEN). We only recommend using the KCl solution saturated with AgCl for the old design of the refillable sensors with reference electrodes without a large AgCl reservoir.

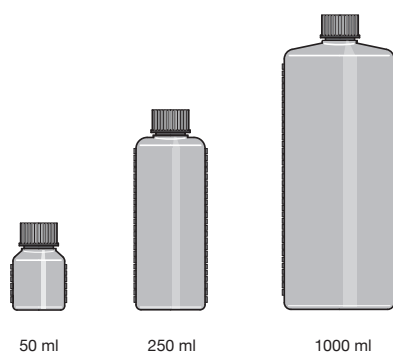

	Capacity	Part No.
KCl solution, 3 molar	50	505533
KCl solution, 3 molar	250	791440
KCl solution, 3 molar	1,000	791441



## Sensor Accessories

### Electrolyte Solutions



250 ml

pk\_6\_058

#### Cleaning solutions

Pepsin/hydrochloric acid cleaning solutions:

For cleaning pH electrode diaphragms contaminated with protein.

##### Part No.

250 ml	791443
--------	--------

#### Conductivity calibration solution

For the accurate calibration of conductivity sensors we recommend using calibration solutions with known conductivity levels.

##### Part No.

Buffer sol. LF 1413 mS/cm	250 ml	1027655
Buffer sol. LF 1413 mS/cm	1000 ml	1027656
Buffer sol. LF 12,88 mS/cm	250 ml	1027657
Buffer sol. LF 12,88 mS/cm	1000 ml	1027658

#### Electrolyte for chlorine, bromine, chlorine dioxide and ozone measuring cells

##### Part No.

CLE all chlorine measuring cells electrolyte, 100 ml	506270
CDM 1 type chlorine dioxide measuring cells electrolyte, 100 ml	506271
CDE chlorine dioxide measuring cells electrolyte, 100 ml	506272
OZE ozone measuring cells electrolyte, 100 ml	506273
Electrolyte for measuring cells types CGE/CTE/BRE, 50 ml	792892
Electrolyte for chlorine dioxide measuring cells type CDP, 100 ml	1002712
Electrolyte for peracetic acid sensors, type PAA 1, 100 ml	1023896
Electrolyte for chlorine probes, Type CLT 1, 50 ml	1022015




pk\_6\_061

### Membrane Caps

#### Spare membrane caps, accessory sets for chlorine, bromine, chlorine dioxide and ozone sensors

##### Part No.


Membrane cap for types CLE II T, CDM 1 and OZE 1	790486
Membrane cap for types: CLE 2.2, CLE 3, CDE 1.2, CDE 2, OZE 2 and OZE 3: this membrane cap is marked with a red dot	790488
Membrane cap for CGE/CTE 1 (2/5/10 ppm) and BRE 1 this membrane cap is orange	792862
Membrane cap for CTE 1 (0.5 ppm); this membrane cap is blue	741274
Membrane cap for CDP 1; this membrane cap is black	1002710
Membrane cap for PAA 1	1023895
Membrane cap for CLT 1	1002710
Accessory set for CGE 2/CTE 1 (2/5/10 ppm) and BRE 1 (2 membrane caps + 50 ml electrolyte)	740048
Accessory set CTE 1 (0.5 ppm) (2 membrane caps + 50 ml electrolyte)	741277
Accessory set for CDP 1 (2 membrane caps + 100 ml electrolyte)	1002744
Accessory kit CLT 1	1022100
Accessory kit PAA 1	1024022



pk\_6\_075

# Sensor Accessories

## DGMa Sensor Housings

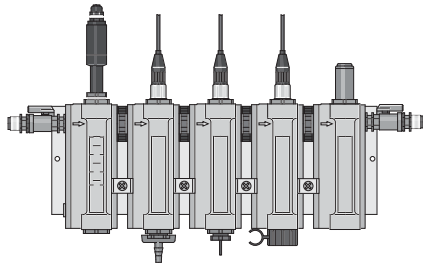

pk\_6\_066

### DGM modular in-line probe housing


To accept conductivity, Pt 100, pH or ORP probes with PG 13.5 screw-in thread, or amperometric sensors with R 1" screw-in thread.

#### Advantages:

- Simple to assemble (already mounted on panel up to max. 7 units)
- Simple retrofit expansion possibility (see expansion modules)
- Module for monitoring flow of sampled water
- Simple to calibrate measured variables due to low sample water volume
- Ball valve on either end for adjusting and impeding flow

Each fully-assembled DGM is equipped with a single sampling cock.

Material:	Transparent PVC (all modules) FPM (seals) PP (calibration cup) PVC white (mounting panel)
Max. temperature:	140 °F, (60 °C)
Max. pressure:	87 psi, (6 bar) / 86 °F, (30 °C) 14.5 psi, (1 bar) / 140 °F, (60 °C) 29 psi, (2 bar),(with flow monitor, 86 °F, (30 °C))
Flow volume:	Up to 21 gph, (80 l/h),(10.5 gph, (40 l/h recommended))
Flow sensor:	Reed contact max. switch power 3 W max. switch voltage 175 V max. switch current 0.25 A max. operating current 1.2 A max. contact resistance 150 mΩ
Switch hysteresis:	approx. 20 %
Enclosure rating:	IP 65
Applications:	Potable, swimming pool water or water of similar quality with no suspended solids
Assembly:	Max. 5 modules pre-assembled onto baseboard: more than 5 modules, pre-assembled onto baseboard as custom version, priced accordingly.FPM = Fluorine Rubber



pk\_6\_071

### Sampling tap for DGM

for PG 13.5 and 25 mm modules designed as a convenient ball valve.

	<b>Part No.</b>
PG 13.5 sampling tap	1004737
25 mm sampling tap	1004739

### Expansion modules for DGM

For simple retrofit to an existing DGM.

	<b>Part No.</b>
Flow expansion module with scale in l/h	1023923
Flow expansion module with scale in gph	1023973
Flow sensor for flow expansion module (optional)	791635

## Sensor Accessories

### DGMa Identcode

DGM	Series Version:						
A	Series						
	<b>Flow monitor module:</b>						
	0	None					
	1	With l/h scale					
	2	With gph scale					
	3	With flow monitor, l/h scale					
	4	With flow monitor, gph scale					
	<b>Number of PG 13.5 modules:</b>						
	0	None					
	1	One PG 13.5 module					
	2	Two PG 13.5 modules					
	3	Three PG 13.5 modules					
	4	Four PG 13.5 modules					
	<b>Number of 25 mm modules:</b>						
	0	None					
	1	One 25 mm module* * 25 mm mounting set needed, P/N 791818					
	2	Two 25 mm modules*					
	<b>Material:</b>						
	T	Transparent PVC					
	<b>Seal material:</b>						
		0	Viton®				
	<b>Connections:</b>						
		0	1/2" x 3/8" tubing adapters				
		1	PVC half-union connections with 1/4" MNPT adapter				
DGM	A	0	0	0	T	0	0

#### Recommended accessories: Part No.

reference potential plug with SS pin	791663
flow sensor (spare)	791635
calibration cup (spare)	791229

Sampling Tap for PG 13.5 module	1004737
Sampling Tap for 25 mm module	1004739

Mounting set for 15 mm (PHEP/RHEP)	791219
Mounting set for 25 mm module (CLE, CTE, CGE, CDE, CDP, OZE)	791818

Bubble disperser for Cl sensor	740207
Bubble disperser for pH/ORP sensors	791703


# Sensor Accessories

## DLG Sensor Housings

### DLG III type in-line probe housing

To accept **2 electrodes** (conductivity, Pt 100, pH or ORP electrodes) with PG 13.5 screw-in thread, **as well as a sensor** with R 1 thread (amperometric sensors) with integrated stainless steel pin as liquid reference potential.

The DLG III is fitted with a plastic ball valve on the input side for stopping and adjusting the sample water flow.

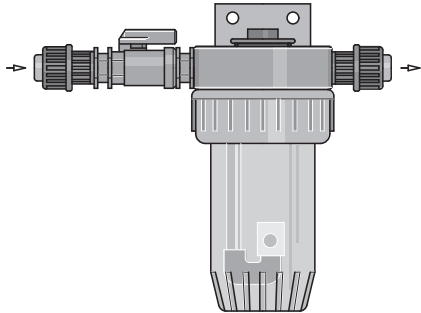


pk\_6\_063

Material:	Rigid PVC
Transparent housing cup:	Polyamide
Ball valve material:	Rigid PVC
Max. pressure:	1 bar
Max. temperature:	55 °C

	<b>Part No.</b>
DLG III A with PVC hose connectors for 8/5 mm Ø PE tubing	914955
DLG III B with PVC adhesive connectors for 16 mm Ø DN 10 pipe	914956
Assembly kit for fitting amperometric sensors	815079

### DLG IV type in-line probe housing

To take **4 electrodes** (pH, ORP, Pt 100, conductivity) with PG 13.5 threaded connector, with integrated stainless steel pin as liquid reference potential. Bracket for wall mounting.

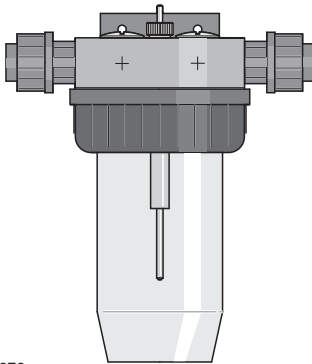


pk\_6\_070

Material:	Hard PVC or PP
Transparent housing:	Polyamide
Max. pressure:	1 bar
Max. temperature:	55 °C for PVC version 80 °C for PP version
Sample water connector:	Union with d 16/DN 10 insert

	<b>Part No.</b>
DLG IV PVC for Ø 16/DN 10 pipe work connector	1005332
DLG IV PP for Ø 16/DN 10 pipe work connector	1005331

## Sensor Holders



### CPVC holder (for pH/ORP)

CPVC universal in-line sensor holder with 3/4" MNPT, 5" (127 mm) long body.	7500192
---	---------

### PVDF holder (for pH/ORP)

PVDF universal in-line sensor holder with 3/4" MNPT, 5" (127 mm) long body.	7500139
---	---------

### Stainless steel holder (for pH/ORP)

Stainless steel universal in-line sensor holder with 3/4" MNPT, 5" (127 mm) long body.	7500194
--	---------

### PG 13.5 Submersible holder (for pH/ORP)

CPVC Waterproof sensor holder with 1-1/2" NPT, 5" (127 mm) long body.	7744693
---	---------

### CPVC holder (for 25 mm sensors)

CPVC universal in-line sensor holder with 2" MNPT, 5" (127 mm) long body.	7500005
---	---------

### 25 mm Submersible holder (consult factory for details)

CPVC Waterproof sensor holder 1-1/2" FNPT, 5" (127 mm) long body.	7744008
---	---------

